





OLYMPUS M3-200H OPERATING MANUAL

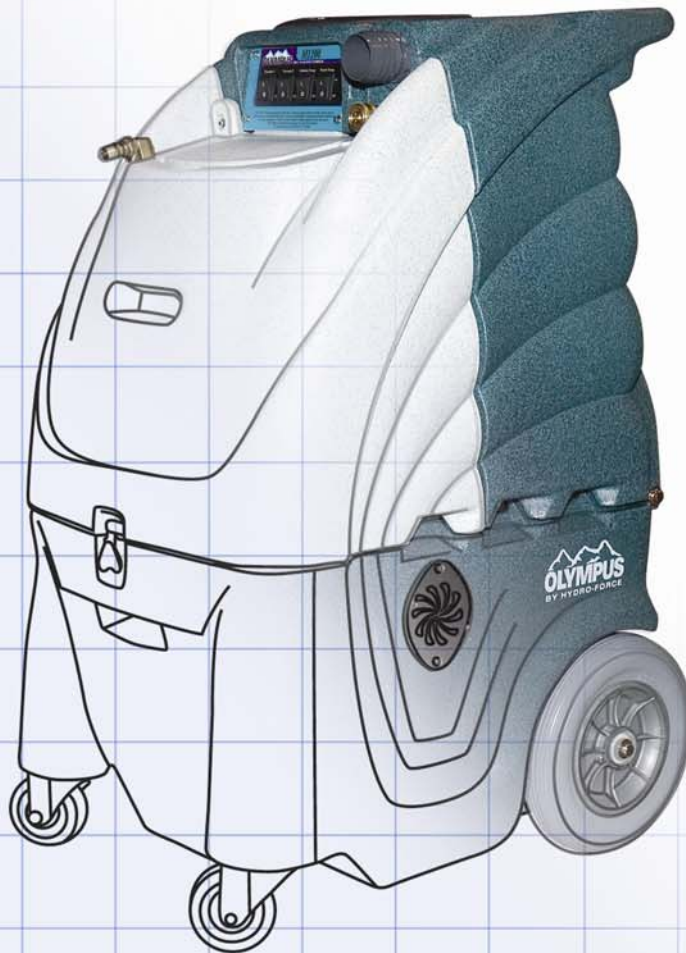

© Copyright Hydro-Force 2005

TABLE OF CONTENTS

| <i>TOPIC</i> | <i>PAGE #</i> |
|---|----------------------|
| • Introduction | 3 |
| • Technical Specifications | 4 |
| • Optional Equipment | 5 |
| <u>SECTION 1: Operational Safety</u> | |
| • Electrical Safety | 6 |
| • Mechanical Safety | 7 |
| <u>SECTION 2: Operation Procedures</u> | |
| • Electrical Supply | 8 |
| • Water Supply & Chemicals | 9 |
| • Chemical Metering Tips | 10 |
| • Water Supply | 11 |
| • Pump Priming | 12 |
| • Solution & Vacuum Hoses | 13 |
| • Heater | 14 |
| • Waste Tank Shutoff | 14 |
| • Pressure Adjustments | 15 |
| • Shutdown Procedures | 16 |
| • Troubleshooting | 17-19 |
| • Solution Flow Path | 20 |
| • Wiring Diagrams | 21 |
| <u>SECTION 3: Maintenance/ Technical</u> | |
| • Maintenance | 24 |
| • Drawings & Parts Lists | |
| ○ Pump | 32 |
| ○ Pressure Regulator | 33 |
| ○ Auto-Fill - optional | 34 |
| ○ Solution Tank | 35 |
| ○ Waste Tank | 38 |
| ○ Base & Vacuum System | 40 |
| ○ Base, Pumps, Components | 41 |
| • Warranty | 42 |



Introduction

Congratulations on your purchase of the Hydro-Force Olympus M3-200H. The M3-200H is designed to give truckmount-level performance in a portable machine that combines versatility with ease of transport. Years of experience, engineering, and planning have gone into the design and manufacturing of the M3-200H. We take a great deal of pride in the M3-200H; our goal is no less than your complete satisfaction.

This manual will provide users with the knowledge required to operate the Olympus M3-200H safely, to understand how to properly operate and maintain the machine, and to ensure that the equipment operates at its maximum performance level.

All users must read and understand this manual completely before operating the machine.

Always maintain this manual in legible condition adjacent to the Olympus M3-200H, or place in a secure location for future reference.

Any questions pertaining to the operating or servicing of this unit should be directed to your nearest Hydro-Force distributor.

This manual is written specifically for the Olympus M3-200H portable extractor units manufactured by:

Hydro-Force
542 W Confluence Ave.
Salt Lake City, UT 84123
801-268-2673
801-268-3856 FAX

Information in this manual is subject to change without notice and does not represent a commitment on the part of Hydro-Force or its parent or affiliated companies.

Technical Specifications

M3-200H High Performance Extractor with Heater

Height: 38"

Length: 28"

Width: 19-1/2"

Weight: 105 lbs.

Solution Tank Capacity: 12 gallon

Recovery Tank Capacity: 12 gallon

Solution Pump: Pump-Tec #114 pump with 1.5amp Motor
200 psi – 2.00 - 0.67 gpm

Vacuum Motors: Two AMETEK Lamb 5.7" diameter – tangential discharge
Three stage – Mounted in series

Power Draw: Cord #1 – 10.35 wide open / 7.65 full load (No Heat)
Cord #2 – 12.03 wide open / 8.84 full load (No Heat)
Cord #1 – 17.00 wide open / 14.45 full load (With Heat)
Cord #2 – 17.48 wide open / 14.25 full load (With Heat)

Heater: 2000 Watt – Dual Element

Standard Equipment

M3-200H High Performance Extractor

Carpet Wand: AW29 - Stainless Steel S-Bend Dual Jet Wand

Vacuum Hose: 25' X 1-1/2" with 1-1/2" cuff & 2" cuff

HP Solution Hose: 25' x 1/4" with 1/4" male / female quick connects

Pump Priming Hose: 12" x 1/4" with 1/4" male quick connect

Power Cords: 2 – 25' x 12gauge with male & female plug ends

Additional / Optional Equipment

Auto Fill System with chemical draw:

Metering Tip Kit:

Hydro-Filter Inline Filter:

Replacement Bags for Hydro-Filter:

Hydro-Force Injection Sprayer – Low pressure:

Hydro-Force Revolution Sprayer – Low pressure:

3.5" Hydry Upholstery Tool:

4.5" Hydry Upholstery Tool:

3.5" Hydry Deluxe Upholstery Tool:

4.5" Hydry Deluxe Upholstery Tool:

1-1/2" Vacuum Hose: (Sold per foot – No cuffs)

2" cuff for 1-1/2" Vac Hose:

1-1/2" cuff for 1-1/2" Vac Hose:

2" Hose Connector PVC:

1-1/2" Hose Connector PVC:

HP Solution Hose: (Does not include Quick Connects)

1/4" Male Quick Connect:

1/4" Female Quick Connect:

Power Cord 25' x 12gauge w/male & female plugs

Power Cord 50' x 12gauge w/male & female plugs

M012

PDE001

AC11

AC11A

AS12

AS12R

AW50A

AW51A

AW50D

AW51D

AH36

AH46

AH42

AH76

AH74

AH79D

100009

100008

AW32

AW33



AW50



AW50D



AS12



AS12R

Safety

CAUTION! This machine is an electrical appliance. Care must be taken to reduce the risk of electrical shock.

- **READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE OPERATING THE M3-200H.**
- To reduce the risk of property damage or injury, repairs to electrical systems should only be performed by experienced technicians. Contact your distributor for assistance.
- Unplug machine power cord from outlet before performing any repairs on the extractor.
- Plug unit into grounded outlets only. Do not remove ground prong from plug. **Use of a Ground Fault Interrupting (GFI) device will reduce the risk of electrical shock.**
- Do not use the M3-200H outdoors, in standing water or on wet surfaces.
- Do not store the M3-200H in wet conditions.
- If extractor is leaking, unplug machine power cords from outlets before approaching or touching machine.
- Do not unplug power cord by pulling on the cord. Grasp the plug when unplugging the cord.
- Do not pull the extractor by the cord.
- If cord or plug is damaged, do not use cord. Replace with new cord or repair as needed before use.
- The power cords used must be able to handle an electrical load of 20amps each.
- The two power cords must be plugged into separate circuits during operation. When both elements of the dual element heater is used each cord must be on a 20amp circuit. If heater is not used, each cord can be on a 15amp circuit. If only one of the heater elements is used, cord #1 must be on a 20amp circuit & cord #2 can be on a 15amp circuit.
- The use of a Breaker Buddy (Hydro-Force part number AX49) will ensure that the two cords are operating on different circuits (see page 8 for details.)

WARNING! This machine must be protected from conditions which may damage the pump, tank, hoses and other components.

- **Freezing of water in this machine will cause serious damage.** The M3-200H, solution hoses, and tools must be protected from freezing temperature. Store, transport, and use this equipment only in temperatures well above freezing. (32°F or 0°C). If you suspect the M3-200H has been frozen, do not plug in or turn on machine until you are sure it has thawed completely.
- If the equipment cannot be stored or transported in a warm environment, it can be guarded from freezing by running an anti-freeze solution through the incoming water lines, chemical feed system, solution pump, solution lines, tools and pump-out pump. The machine is filled at the factory with anti-freeze to eliminate damage during shipment in cold weather. The anti-freeze solution must be completely flushed from the machine before it is returned to service.
- The M3-200H must not be used to pick up flammable or combustible materials or used in areas where these materials may be present.
- Solvent-based or water-based solutions containing solvents may damage the pump, hoses, and other components. Do not assume chemical compatibility. Contact your distributor or Hydro-Force if you have questions regarding the compatibility of your chemicals with the machine.
- Do not clean with solutions in the tank that are at temperatures above 140°F. Turn pump ON and prime pump before turning heater ON.
- Rinse the solution tank, chemical system, and pump with fresh water after each day's use.
- Do not allow pump to run dry. Always maintain adequate solution level to supply solution pump.
- HP hoses may rupture if worn or damaged. Do not use HP solution hoses if hose covering is cut, bulging, or otherwise damaged. Examine HP solution hoses daily and replace or repair hoses as needed.
- Rinse tank and store the M3-200H with the recovery tank lid open. Use a Hydro-Filter and clean the recovery tank daily to keep machine cleaner.
- Keep Vacuum Inlet Filter clean and check float ball for proper operation. Do not operate the M3-200 without the Vacuum Inlet Filter in place. **Use defoamer to eliminate foam build-up during cleaning and prevent foam/moisture from entering vacuums.**

*****Use common sense to protect yourself and others while using this equipment.*****

- Keep pets and children away from the machine when in use.
- Keep all body parts, hair, and loose clothing away from openings and moving parts. Always wear appropriate clothing and safety equipment when operating unit.
- Use extra care when cleaning on stairs. Wet carpet on stairs can be slippery.
- Do not move the M3-200H up or down stairs when tanks are full of water. Drain solution and recovery tanks before moving unit up or down stairs. Lift using only the appropriate handles.
- Water may be spilled, drip, or be exhausted from vacuums during operation. Place unit in area where water will not cause damage or use drop cloth to protect surfaces.

Operation Procedures

Knowledge of the proper operation of the M3-200H is required to ensure user safety and efficient performance of the extractor.

SET UP AND OPERATION

1. Electrical Cords:


Two 25' power cords are supplied with the Olympus M3-200H. Cord #1 powers Vacuum Motor #1 and heater element #2; Cord #2 powers the Solution Pump, Vacuum Motor #2 and heater element #1. The amperage required by each cord requires that the two cords be plugged into separate 20amp circuits.

Plug the two power cords into two outlets from different circuits.

If you are not sure if you are connected to separate circuits, use a Breaker Buddy (item # AX49), available from Hydro-Force, to test your circuits in the following manner:

- Plug the cords into the two outlets being tested, and then plug the Breaker Buddy into the two cords.
- If the green indicator light fails to light, you may be on the same circuit and must select a different plug for one of the cords.
- If the green indicator light comes on, you are plugged into two different circuits; connect the cords to the machine and proceed with your set-up procedure.

If a circuit breaker trips during operation, reset the breaker and move the cord to another outlet as needed.

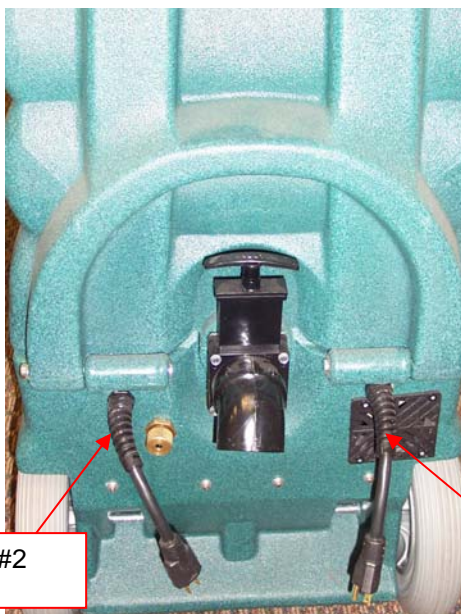

Cord #2

Cord #1



Power Cord – AX32
25' – 12 gauge M-F Plugs



Breaker Buddy – AX49

2A. Water Supply & Chemical Mixing– Manual Fill:

- Pour up to 12 gallons of hot water into the solution tank at the front of the machine. **The water temperature in the solution tank cannot exceed 140°F.**
- Measure and add the appropriate amount of the desired liquid chemical to the water in the solution tank. The amount of chemical will vary depending on the type of chemical used, the amount of water in the tank, and the material being cleaned; consult the chemical packaging for specific mixture ratios.
- Powdered chemicals should be dissolved in water before adding to the water in the solution tank.

DO NOT RUN OUT OF WATER WHILE USING THE MACHINE! Ensure that the tank contains enough water to complete each job. If the water level is low: stop cleaning, turn off the pump, and refill the tank. Running the pump dry will damage the pump and void the warranty.



Pour appropriate amount of hot water into solution tank




Add appropriate amount of chemical to water in solution tank

2B. Water Supply & Chemical Dilution – Optional Auto-Fill System:

- The chemical dilution rate is controlled by the metering tip, and the dilution rate can only be changed by changing the metering tip (See “How to Change the Metering Tip” on Page 10 for instructions.)


Chemical Feed Setup:

- Remove the chemical feed hose from the solution tank.
- Place the end of the hose into a container of liquid chemical.
- If the tip is removed, and the proportioning system operated with no tip, the dilution rate will be 8:1 (the equivalent to adding 16-1/4oz of chemical to each gallon of water.)
- The standard tip used with the M3-200H is the turquoise tip with a dilution rate of 256:1. This means that for each gallon of water flowing into the machine, 1/2 ounce of chemical will be added.
- **If a fresh water rinse with no chemical is desired, simply leave the chemical feed hose inside the solution tank.**

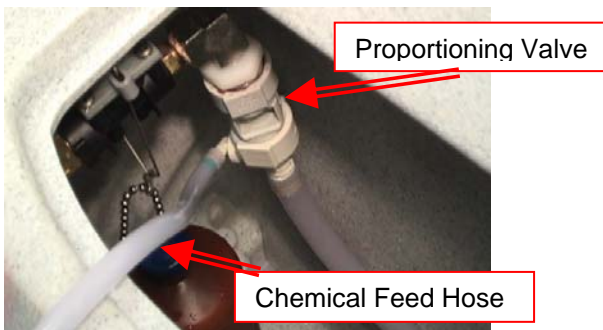

How to Change the Metering Tip:

- Remove the chemical feed hose from the barb on the side of the proportioning valve.
- Unscrew and remove the old tip.
- Screw in the proper tip for your chemical tip and place the hose back on the barb

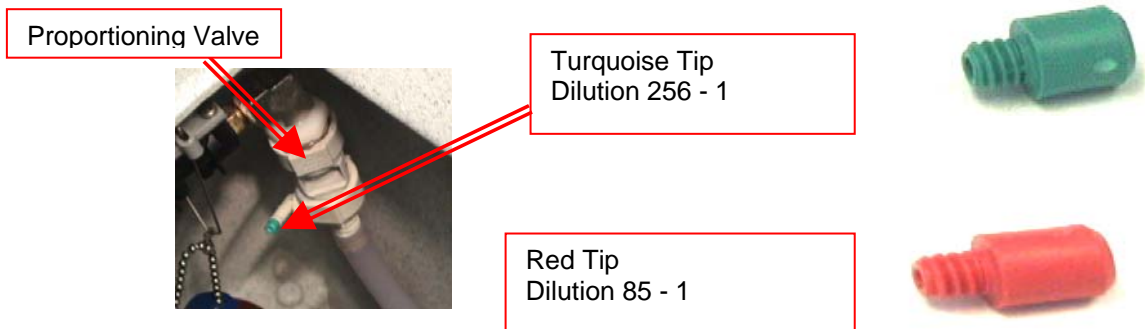

Metering Tip Kit – PDE001

Metering Tip Kit (Hydro-Force Item# PDE001) contains 14 different colored metering tips, allowing dilution rates from 11:1 up to 427:1. Refer to the chart below to select the tip that meets the dilution rate for your chemical application.

- For example: if you require 1-1/2 ounces of chemical per gallon of water, change to the red metering tip with the dilution rate of 85:1.
- The dilution rates are based on chemicals with water-like viscosity. Thicker (more viscous) chemicals will dilute at a different rate.
- For powdered chemicals, a liquid concentrate must be made. Mix the concentrate according to the manufacturer's directions, and then select the appropriate metering tip.
- Contact your distributor or Hydro-Force if you have questions about your chemical.


Metering Tip Application Chart:



| TIP COLOR | CHEMICAL DILUTION RATES OZ / GAL (RATIO) | |
|------------------|---|----------------|
| TAN | 0.30 | (427:1) |
| ORANGE | 0.40 | (320:1) |
| TURQUOISE | 0.50 | (256:1) |
| PINK | 0.75 | (170:1) |
| LIGHT BLUE | 1.00 | (128:1) |
| BROWN | 1.12 | (114:1) |
| RED | 1.50 | (85:1) |
| WHITE | 1.75 | (73:1) |
| GREEN | 2.00 | (64:1) |
| BLUE | 2.50 | (51:1) |
| YELLOW | 3.75 | (34:1) |
| BLACK | 5.00 | (26:1) |
| PURPLE | 8.50 | (15:1) |
| GRAY | 11.50 | (11:1) |
| NO TIP | 16.25 | (8:1) |

Water Supply:

- Once the correct metering tip is in place:
 - Connect the Auto-Fill Water Supply Hose to the water inlet (the male quick-connect on the front of the machine.)
 - Connect the other end of the hose to a water faucet, and then turn on the water.
- Hot water can be used as long as the temperature does not exceed 140°F.
- Faucet adapter kits (Hydro-Force item #AX21 & AX22) are available that allow connection to different types of faucets if needed.

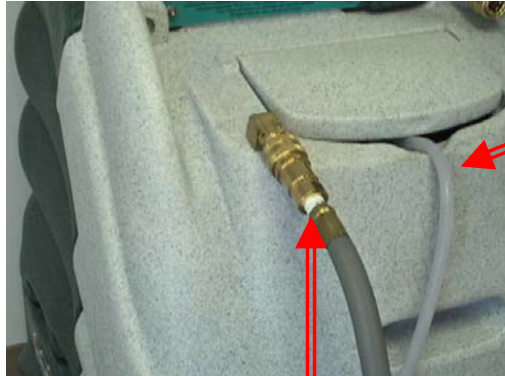

Chemical Feed Hose



Connect the Auto-Fill Water Supply Hose to Solution Inlet (Male quick connect on the front of the machine.)

3/8" id X 25' with F Quick Connect & F Garden Hose Fitting




Connect the Auto-Fill Water Supply Hose to a faucet and turn on the water

To adjust the water level in the solution tank:

- Turn off the water supply.
- Adjust the length of the chain connecting the float bottle to the float valve.
- Snap the beaded chain off the connector on the valve.
 - Move the bottle down to decrease the water level.
 - Move the bottle up to increase the water level.
- Snap the chain back into the connector.
- Turn the water supply back on.

If the chemical is not drawing, or if the tank is not filling or is overflowing, refer to the trouble shooting guide, or contact your distributor for assistance.

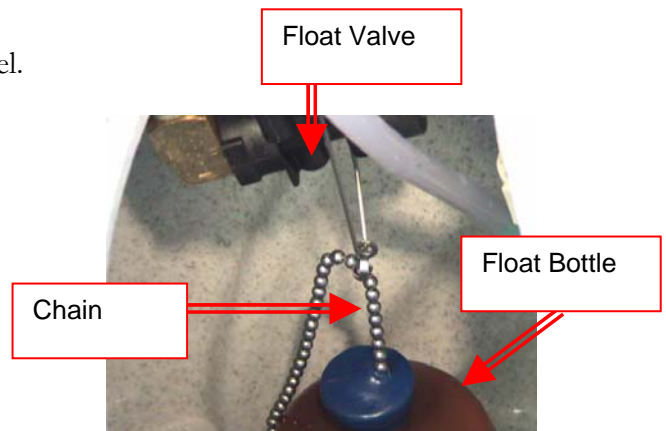

3. Priming the High-Pressure Pump:

Once water is in the solution tank, the high-pressure solution pump must be primed (**Do not turn heater ON until pump is primed.**):

- Connect the short prime hose to the solution outlet (female quick-connect on the front of the machine.)
- Direct the end of the hose back into the solution tank and turn the solution pump switch to the ON position.
- When a steady stream of water is flowing out of the hose, turn off the solution pump, remove the hose, and proceed with the set-up procedures.

If the pump does not prime quickly, the vacuum may be used to aid priming:

- Direct the end of the short prime hose into the vacuum barb on the front of the machine.
- Turn on one or both of the vacuum motors
- Turn on the solution pump.
- Cup a hand around the hose & barb to increase the vacuum suction on the hose.
- When water is flowing out of the hose, direct the hose to the solution tank and turn off the vacuum motors to ensure the flow continues when the vacuum is removed.
- When the flow is steady, turn off the solution pump, remove the hose, and proceed with machine set-up procedures.

If the pump still does not prime, or if flow is low or unsteady, check the hose from the solution tank to the pump (as well as the inline filter) for clogging, kinks, or restrictions. Clean or replace hose and/or filter and repeat the priming procedure.

If you are having trouble with the pump, refer to the trouble shooting guide or contact your distributor for advice or assistance.



Pump Prime Hose
NM5080



Place end of prime hose and use vacuum to prime the solution pump.




Keep prime hose connected and run pump until flow is strong and steady

4. Connection of Solution Hose:

Connect the high pressure solution hose to the solution outlet (female quick connect on the front of the machine). Connect the other end of the hose to the male quick connect on the cleaning tool. When you are ready to start cleaning, turn the solution pump switch to the ON position



HP Solution Hose Assembly – AH79D
1/4" id X 25' with M-F Quick Connects

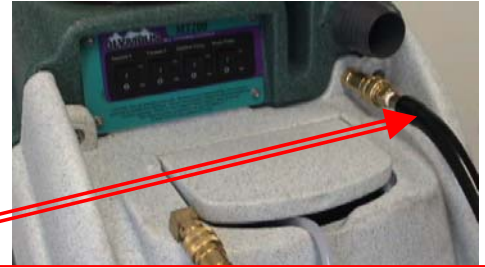

Connect the male end of the HP Solution Hose Assembly to the female solution outlet fitting on the machine. Connect the female end to the cleaning tool.

5. Connection of Vacuum Hoses:

A 1-1/2" x 25' Vacuum Hose is included with the M3-200H. The 2" cuff on the 25' vacuum hose is connected to the Vacuum Barb on the front of the machine. The other end with the 1-1/2" cuff is connected to the cleaning tool.

When ready to begin cleaning, turn both vacuum switches to the ON position. While the M3-200H can be operated with only one vacuum for cleaning delicate fabrics, in most situations you will turn both vacuum switches ON.



Vacuum Hose
1-1/2" x 25' with 2" & 1-1/2" cuffs



6. Heater:

To prevent damage to the heater, the heater must have water in it before it is turned ON.

Fill solution tank, prime the pump and connect solution hoses before turning heater ON.

The heater has two 1000 watt heating elements. For maximum heat, turn the heater switch to the Dual element position (2000 watts). To reduce heat or limit power draw, turn the heater switch to the Single element position (1000 watts). Allow the heater to heat up for about 5 minutes before starting to spray tool.

While the heater allows for maximum operating temperature of approximately 190°F, the temperature of the cleaning water delivered to the tool is dependant on two factors:

- The starting temperature of the water: Starting with hotter water will require a smaller temperature increase from the heater to reach the maximum temperature. **The water temperature in the solution tank cannot exceed 140°F.**
- Flow rate: The lower the flow rate of the water through the heater, the more time the water will be inside the heater. The water will have more time to be heated and can reach a higher temperature. High water usage and flow rate will not allow the water enough time to be heated and the temperature of the water delivered to the tool will be much lower.

The flow rate can be lowered by putting smaller jets in the cleaning tool and by reducing the amount of time the wand is sprayed. Taking additional drying strokes without spraying water between spraying strokes will help increase the potential temperature rise.



Dual Element
Heater **NM5044**



7. Waste Tank Shutoff:


When the recovery tank fills during cleaning, the float ball assembly in the vacuum inlet filter will rise and will automatically shut off the vacuum air flow to prevent the recovery tank from overfilling and waste water from getting into the vacuums. When this occurs:

- Immediately shut off the vacuum switches.
- Drain the recovery tank.
 - Turn off the pump switch while draining the tank.
 - Turn pump switch back upon resumption of cleaning.
- Close the drain valve and turn the vacuum switches back on when ready to resume cleaning.

If the Waste Tank Shutoff is not working properly, refer to the trouble shooting guide or contact your distributor for advice or assistance.



Float Shutoff Assembly – NM5037

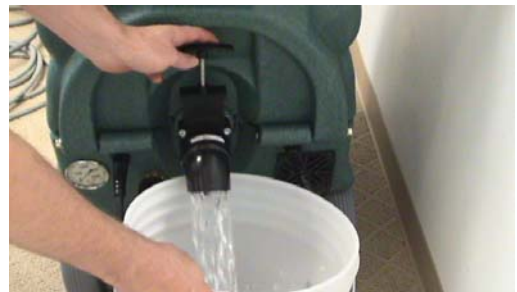

Draining the Recovery Tank

8. Pressure Adjustment:

The pressure regulator of the M3-200H is not adjustable. It is preset at the maximum pressure setting of 200psi; however, the highest pressure attained is dependent on the amount of water flow at the tool. The maximum flow rate to maintain 200psi is 0.67gpm. This means to maintain 200psi the largest jet size is for a single jet tool is 03 or two 015 jets on a dual jet cleaning wand.

- Smaller jets and lower flow will allow for higher pressure at the tool.
- Larger jets and higher flow will lower the maximum pressure attained at the tool.

The number found on the face of the jet, such as 8003, 95015 or 11004, states the size and shape of the jet orifice. The first two or in some cases three numbers (80, 95 & 110) represent the spray angle. The last two or in some cases three numbers (03, 015 & 04) represent the orifice size. The orifice size number represents the flow through that jet at 40psi in tenths of a gallon per minute. Thus a small orifice such as 015 will flow 0.15gpm at 40psi. A larger orifice such as 04 will flow 0.40gpm at 40psi. (See chart below.)

Different jets with the same spray angle (8001, 8003 & 8004) can have different orifice sizes.
Different jets with the same orifice size (80015, 95015 & 110015) can have different spray angles.

Choose the jets that will meet the flow rate at your desired pressure and have the spray pattern suited to your tool and type of cleaning.

If maintaining pressure becomes a problem, refer to the trouble shooting guide or contact your distributor for advice or assistance.

Tee Jets and Vee Jets

| Orifice Size | Equiv. Dia. in inches | Flow Capacity (Gallons Per Minute) | | | | | | |
|--------------|--------------------------|------------------------------------|-------|--------|--------|--------|--------|---------|
| | | 40psi | 60psi | 100psi | 200psi | 300psi | 500psi | 1000psi |
| 01 | 0.026 | 0.10 | 0.12 | 0.16 | 0.22 | 0.27 | 0.35 | 0.50 |
| 015 | 0.031 | 0.15 | 0.18 | 0.24 | 0.34 | 0.41 | 0.53 | 0.75 |
| 02 | 0.036 | 0.20 | 0.25 | 0.32 | 0.45 | 0.55 | 0.71 | 1.00 |
| 03 | 0.043 | 0.30 | 0.37 | 0.47 | 0.67 | 0.82 | 1.10 | 1.50 |
| 04 | 0.052 | 0.40 | 0.49 | 0.63 | 0.89 | 1.10 | 1.40 | 2.00 |
| 05 | 0.057 | 0.50 | 0.61 | 0.79 | 1.10 | 1.40 | 1.80 | 2.50 |
| 06 | 0.062 | 0.60 | 0.73 | 0.95 | 1.30 | 1.60 | 2.10 | 3.00 |
| 08 | 0.72 | 0.80 | 0.98 | 1.30 | 1.80 | 2.20 | 2.80 | 4.00 |
| 10 | 5/64 | 1.00 | 1.20 | 1.60 | 2.20 | 2.70 | 3.50 | 5.00 |
| 15 | 3/32 | 1.50 | 1.80 | 2.40 | 3.40 | 4.10 | 5.30 | 7.50 |

To determine the flow rate of tools with multiple jets, add the flow of each jet together to calculate the total flow at the desired pressure.

Shutdown Procedures:

- If using the auto-fill system, turn the water supply off before finishing each job. This will allow use of the water and chemical already in the tank, and will reduce the amount of excess water to be disposed of later.
- When finished cleaning, turn off all switches.
- If the auto-fill system was used and there is still water in the solution tank, push the float down to release the water inlet hose pressure before disconnecting the hose from the faucet. Disconnect the water inlet hose from the quick-connect on the front of the machine.
- Disconnect the solution hose and vacuum hose from the cleaning tool. Pull valve trigger to release pressure from the hose before disconnecting solution hose from cleaning tool.
- If used disconnect the Hydro-Filter from the vacuum hoses and clean the filter as needed. Replacement filter bags are available (AC11A.)
- Disconnect the vacuum hose and solution hose from the machine.
- If water remains in the solution tank, use the vacuum and vacuum the excess water from the tank.
- If the auto-fill system was utilized, place the chemical feed hose back into the solution tank.
- Disconnect the power cords from the outlets and from the machine.
- Remove the float shutoff assembly from the recovery tank and clean filter as needed. Replace shutoff assembly and tank lid.
- Drain any remaining water from the recovery tank and dispose in sanitary drain. Do not use the same bucket to drain the tank that you use to fill the tank.
- Roll up all hoses and cords.
Collect and store extractor, all tools, and accessories.



Troubleshooting

Troubleshooting – Olympus M3-200H

| Problem | Cause | Solution |
|--|---------------------------------------|---|
| Machine not turning on - No power | Building circuit breaker tripped. | Reset breakers or move cords to other outlets |
| | Faulty power cord | Replace cord (AX32) |
| | Faulty switches or internal wiring | Check wiring & test switches - Repair as needed * |
| Solution Pump not running | Building circuit breaker tripped. | Reset breakers or move cords to other outlets |
| | Faulty power cord | Replace cord (AX32) |
| | Faulty switches or internal wiring | Check wiring & test switches - Repair as needed * |
| | Pump motor faulty | Replace pump motor (PT061) |
| | Pump seized - trips breaker | Repair or replace pump head & bearing - Check motor (PT050 or AP50) |
| Low Solution Pressure and/or Pulsation | Jets too large for pressure desired | Check jets size & flow rates use smaller jets or lower pressure |
| | Jets worn allowing too much flow | Replace jets |
| | Solution inlet filter plugged | Clean or replace filter |
| | Hose from solution tank restricted | Repair or replace hose |
| | Pump intake hose or fittings leaking | Repair or replace hose. Tighten clamps or replace fittings |
| | Pressure regulator sticking | Repair or replace pressure regulator (PT048A or PT048) |
| | Pressure regulator faulty | Repair or replace pressure regulator (PT048A or PT048) |
| | Filter screen or jets plugged on tool | Clean out filter or jets |
| | Solution tank empty | Add water to tank - Check & repair auto fill assembly |
| | Pump not primed | Perform pump priming procedure |
| | Pump faulty | Repair or replace pump (AP50) |
| | Tool valve faulty | Repair or replace valve |
| | Quick connects or hoses restricted | Clean out or replace quick connects and/or hoses |
| Can't connect solution hose to machine | Pressure in lines | Release pressure |
| | Quick connects faulty | Replace quick connects (100008, 100007) |
| | Wrong style/size quick connects | Replace quick connects to match connects on machine |
| * To reduce the risk of fire electrical shock or injury repairs to wiring should only be performed by experienced service technicians. If you are not experienced in checking electrical wiring contact your nearest authorized service center to perform tests and repairs to wiring and switches. | | |


| Problem | Cause | Solution |
|---|------------------------------------|--|
| Heater not getting Water hot | Building circuit breaker tripped. | Reset breakers or move cords to other outlets |
| | Faulty power cord | Replace cord (AX32) |
| | Heater Switch not ON or set right | Turn switch ON – Move from Single to Dual position |
| | Water start temperature too low | Use hot water in solution tank - 140°F maximum |
| | Heater not given time to preheat | Turn heater ON and wait 5 minutes before spraying tool |
| | Tool jets too large – High Flow | Replace tool jets with smaller jets to reduce flow rate |
| | Water usage too high | Slow down cleaning – more drying strokes – less spraying |
| | Temp switches faulty | Test 190°F & 230° switches & replace as needed* |
| | Heating Element Faulty | Replace heater (NM5044) |
| | Faulty switches or internal wiring | Check wiring & test switches - Repair as needed * |
| | | |
| Vacuum Motor not running | Building circuit breaker tripped. | Reset breakers or move cords to other outlets |
| | Faulty power cord | Replace cord (AX32) |
| | Faulty switches or internal wiring | Check wiring & test switches - Repair as needed * |
| | Vacuum motor faulty | Replace vacuum motor (AV14) |
| | | |
| Loss of Vacuum | Vacuum motor faulty | Replace vacuum motor (AV14) |
| | Vacuum motor gasket damaged | Replace gasket (PA010) |
| | Recovery tank lid gasket damaged | Replace gasket (NM5059) |
| | Drain valve open | Close valve |
| | Drain valve leaking | Repair or replace drain valve (PEA11) |
| | Vacuum motor hoses loose / leaking | Reconnect or replace vacuum motor hoses |
| | Vacuum hose or tool clogged | Clean out vacuum hoses and tool |
| | Vacuum hoses or cuffs leaking | Replace vacuum hoses, cuffs & connectors as needed |
| | Recovery tank full | Drain tank |
| | Float shutoff filter clogged | Clean float shutoff filter |
| | Ball stuck in float shutoff | Repair or replace float shutoff (NM5037) |
| | Pump-out Check Valve stuck open | Clean out or replace check valve(NM5052) |
| | Recovery tank damaged | Replace recovery tank |
| | | |
| Chemical not feeding Optional Auto-Fill | Solution tank not filling | Check & repair auto fill assembly |
| | Chemical hose restricted | Un-kink, shorten, clean out or replace hose |
| | Filter screen plugged | Clean or replace filter (PDE100-11P) |
| | Low Incoming Water Pressure | Set chemical bottle on top of machine – Shorten Chemical hose – Find other water source. |
| | Wrong size metering tip | Change metering tip |
| | Chemical proportioner faulty | Replace chemical proportioner (PDE61-22-3) |
| | Check valve in filter faulty | Replace filter (PDE100-11P) |
| | | |
| Tool won't spray - low or uneven spray | Jets clogged | Clean out or replace jets |
| | Inline filter clogged | Clean out or replace filter |
| | Jets worn | Replace jets |
| | Jets not aligned properly | Re-align jets |
| | Tool valve faulty | Repair or replace valve |
| | Quick connects or hoses restricted | Clean out or replace quick connects and/or hoses |
| | | |
| <p>* To reduce the risk of fire electrical shock or injury repairs to wiring should only be performed by experienced service technicians.</p> <p>If you are not experienced in checking electrical wiring contact your nearest authorized service center to perform tests and repairs to wiring and switches.</p> | | |

| Problem | Cause | Solution |
|--|------------------------------------|--|
| Solution Tank not filling | Water source turned off | Turn on faucet or find other water source |
| | Float not on valve arm | Reconnect float to valve arm - Adjust to proper height/level |
| | Float valve faulty | Repair or replace float valve (NM5055) |
| Optional Auto Fill | Water hose restricted | Un-kink, clean out or replace hose |
| | Quick connects faulty | Clean out or replace quick connects (100008, 100007) |
| | | |
| Solution tank overflowing Optional Auto Fill | Float too heavy/ Filled with water | Replace float (PHY005-003) |
| | Float & chain tangled | Make sure float chain free & hanging properly |
| | Float too high | Adjust chain to set float at proper level |
| | Float valve faulty | Repair or replace float valve (NM5055) |
| | | |
| Chemical Jug Filling with water - Overflowing Optional Auto Fill | Foot valve in Filter stuck | Clean out foot valve and filter |
| | Foot valve in Filter faulty | Replace foot valve and filter (PDE100-11P) |
| | | |
| | | |
| | | |
| <p>* To reduce the risk of fire electrical shock or injury repairs to wiring should only be performed by experienced service technicians. If you are not experienced in checking electrical wiring contact your nearest authorized service center to perform tests and repairs to wiring and switches.</p> | | |

- Contact your distributor for additional troubleshooting assistance, to order parts, or for advice and assistance in performing necessary repairs.


M3-200H


Solution Flow Path

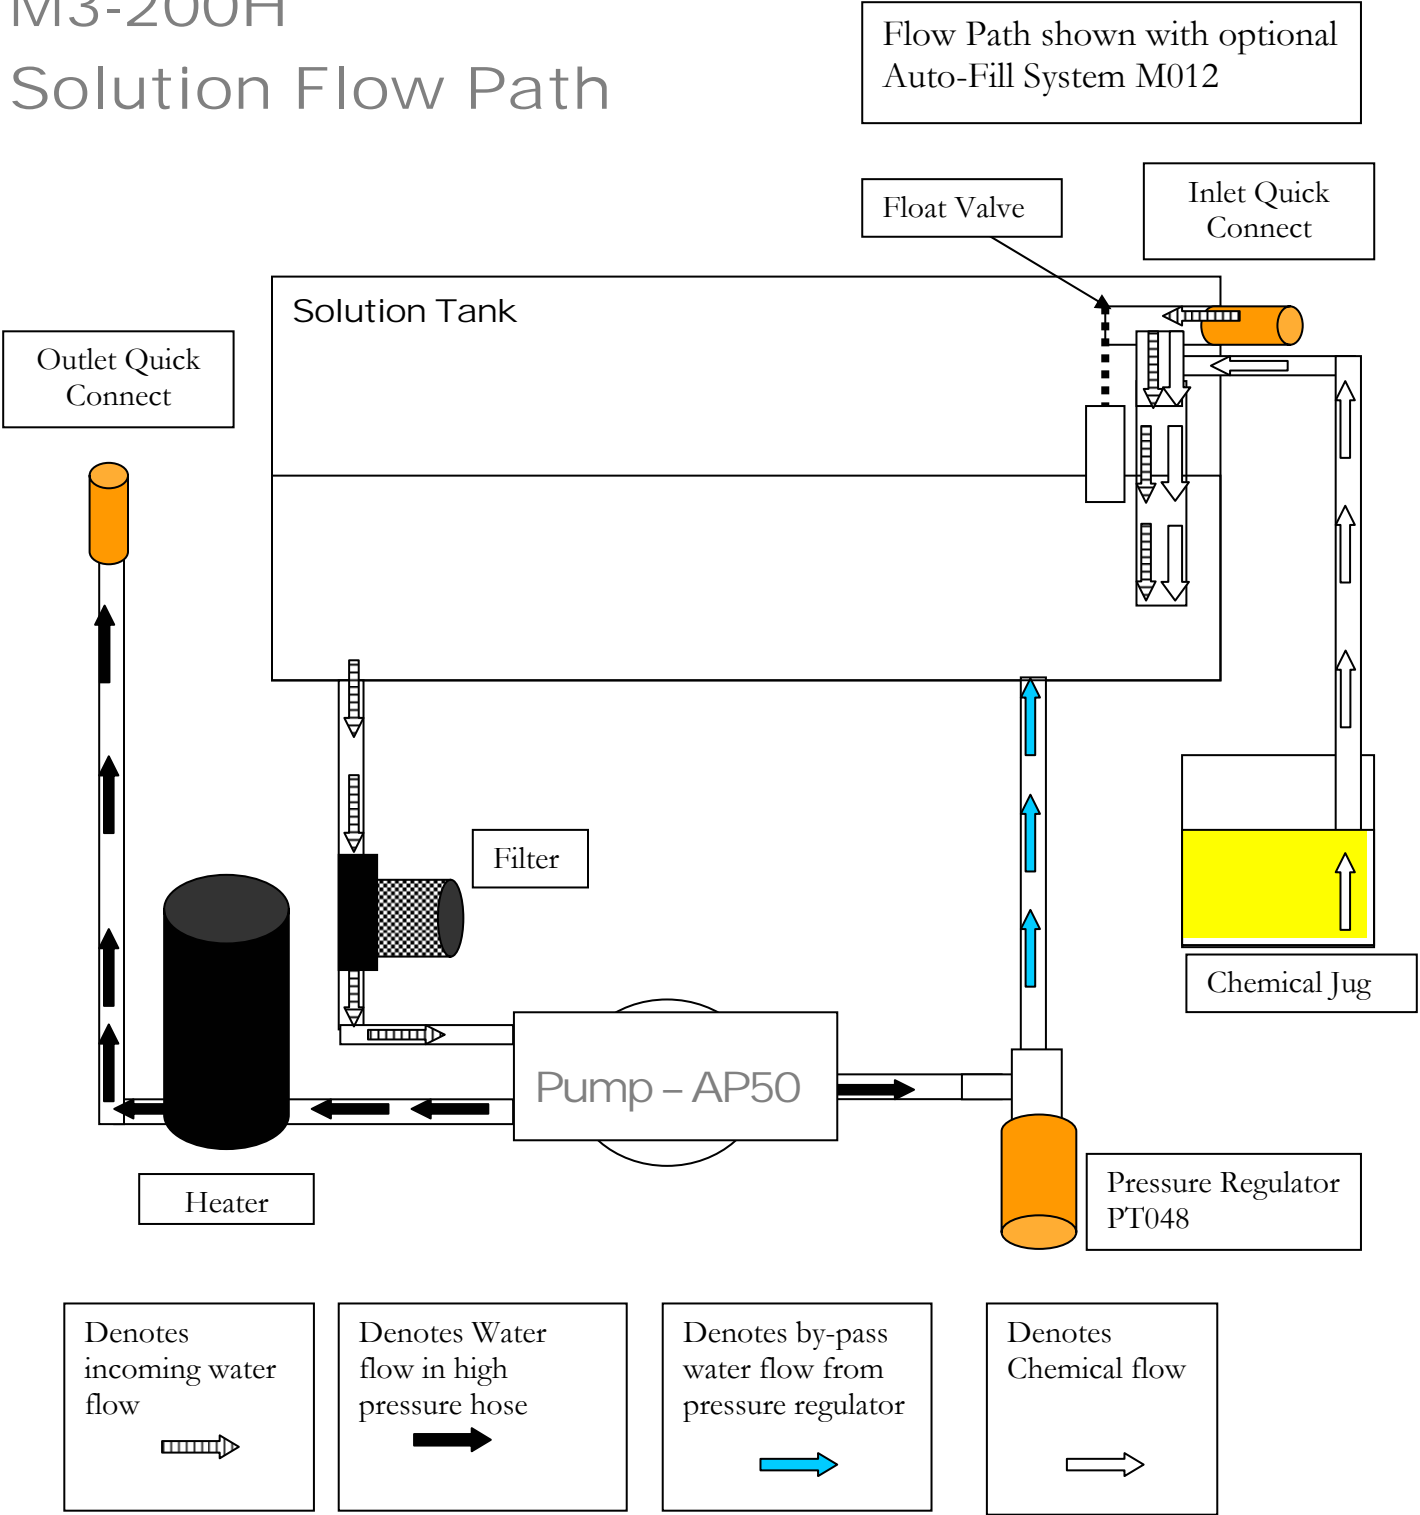

M3-200H

Wiring Diagram - Standard

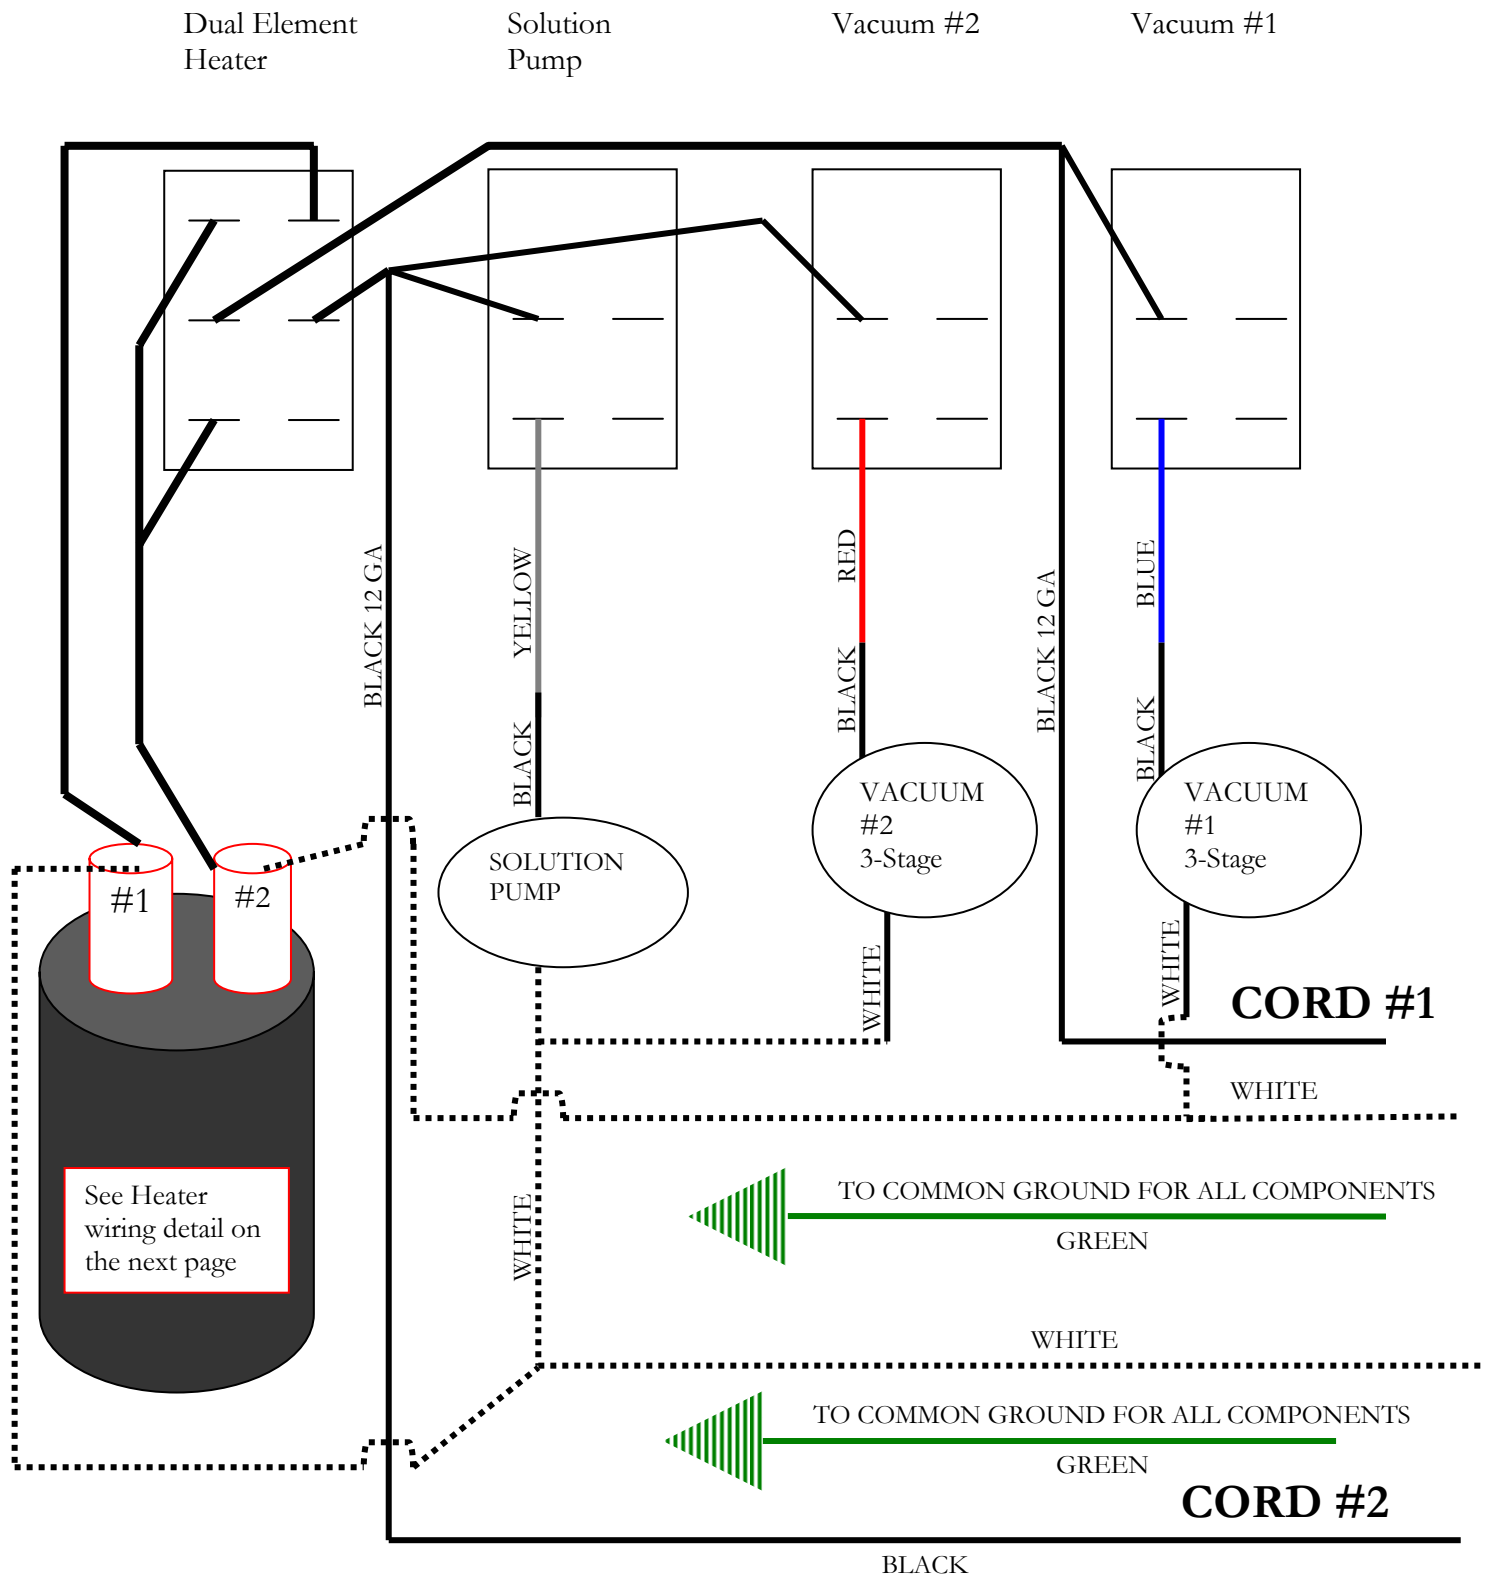

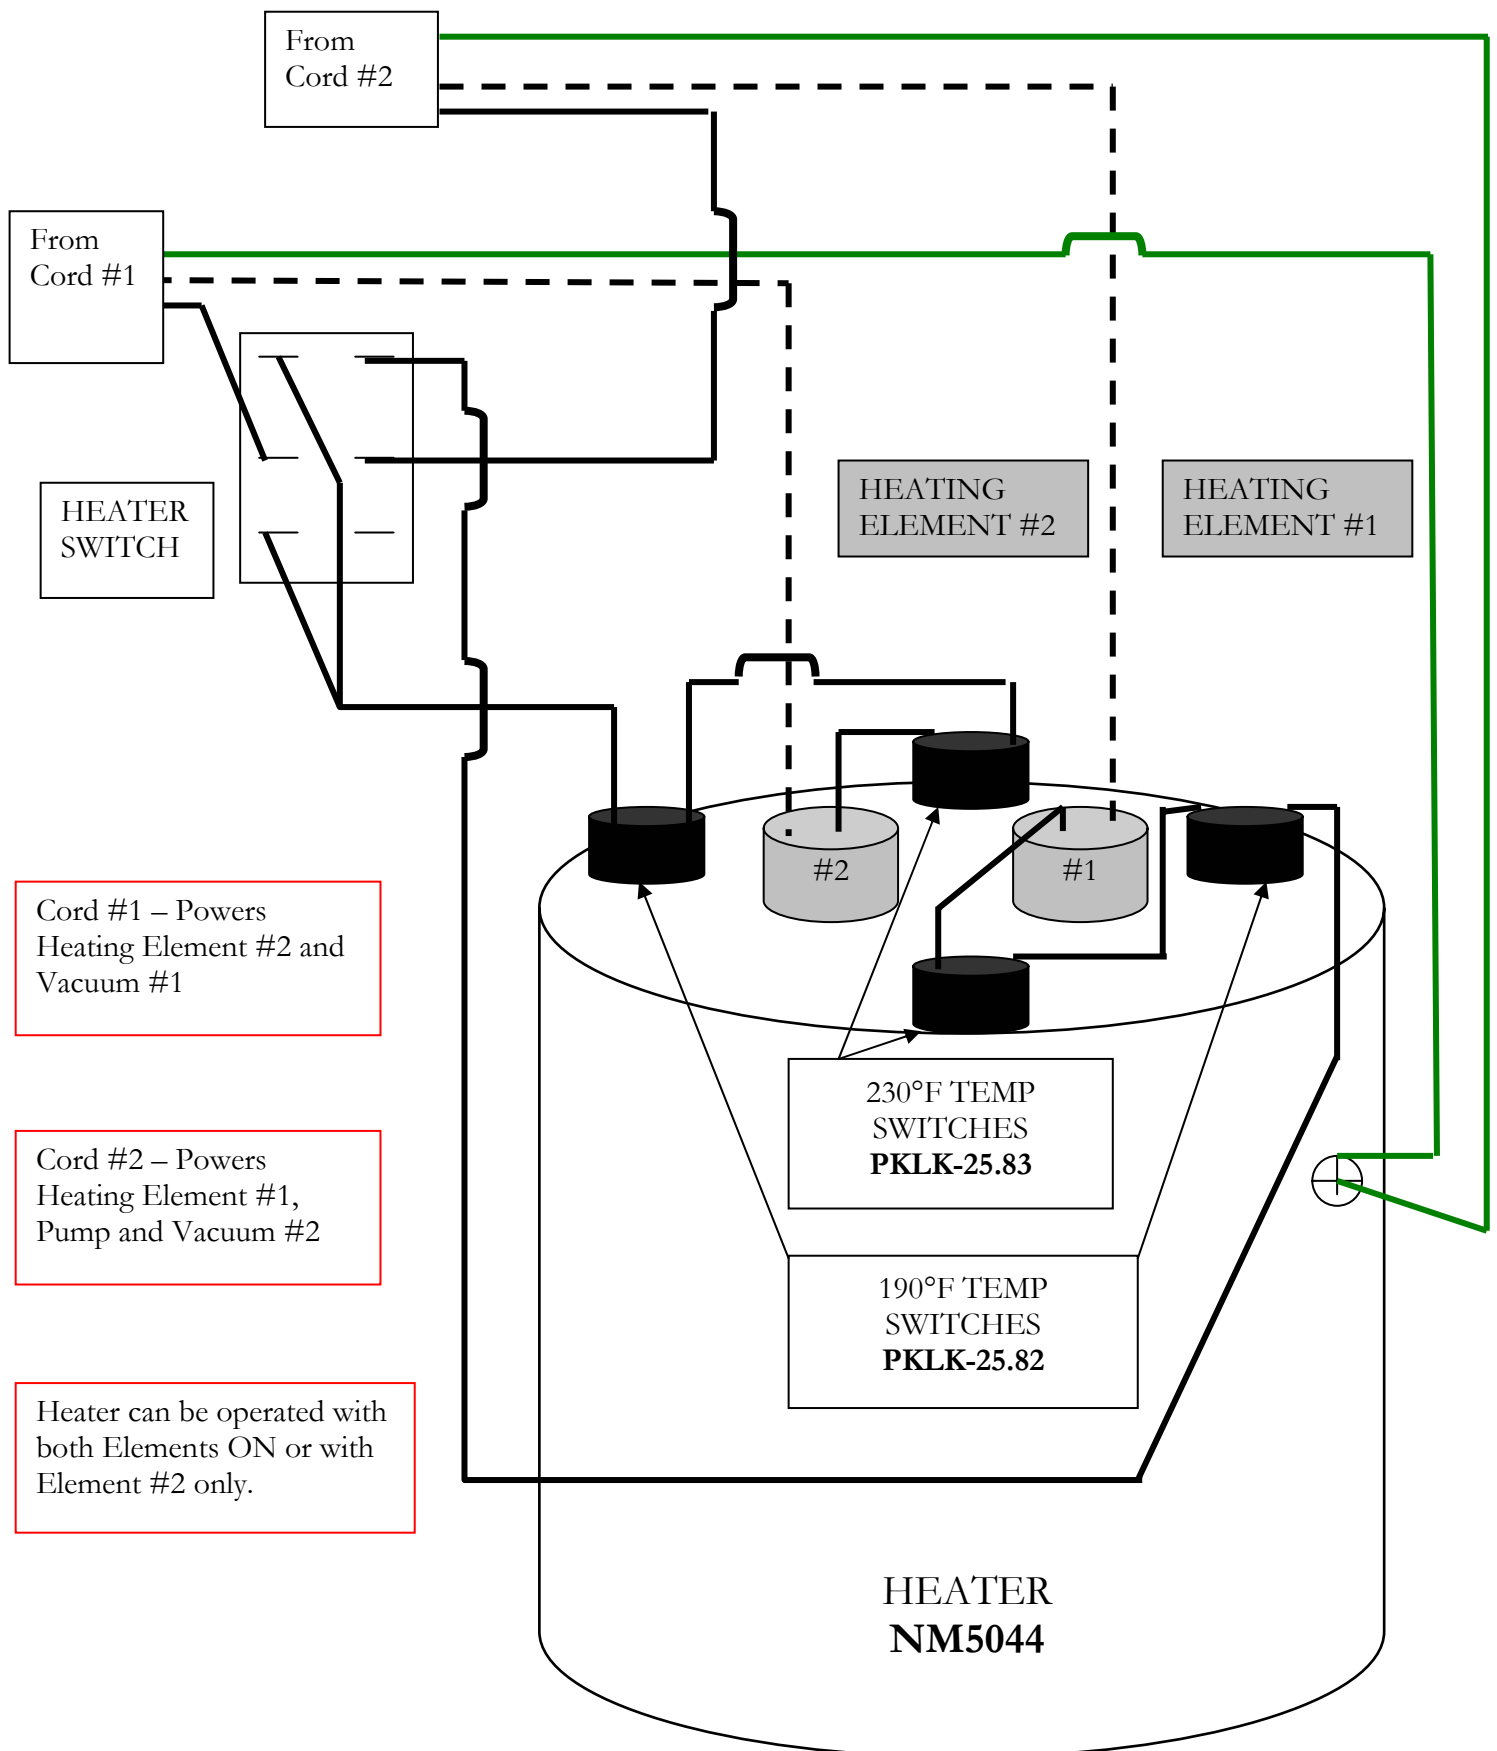

OLYMPUS M3-200H SWITCH PANEL:



Vacuum #1 – Power from Cord #1.

When the switch is turned to the ON position power is supplied to the vacuum motor. (3-Stage Vacuum)

Vacuum #2 – Power from Cord #2.

When the switch is turned to the ON position power is supplied to the vacuum motor. (3-Stage Vacuum)

Solution Pump Switch – Power from Cord #2.

When the switch is turned to the ON position power is supplied to the solution pump motor. When not using solution (Extracting Only) do not turn this switch ON.

Heater Switch – Power from Cord #1 & #2

When the switch is turned to the Dual position, both heating elements will be ON (2000 watts). Element #1 draws power from Cord #2 and Element #2 draws power from Cord #1.

When the switch is turned to the Single position, only Element #2 will be ON (1000 watts).

Maintenance

Proper maintenance is required to keep the M3-200H operating properly, prevent downtime and to extend the life of your equipment.

WARNING: Disconnect electrical power before performing any service or maintenance inside machine base or before testing or repairing switches or power cords. Failure to do so may result in severe personal injury or death.

| OPERATION | INTERVAL | Page # |
|---|------------------------|--------|
| CLEAN CHEMICAL FEED FILTER & FOOT VALVE (Machines with optional AUTO-FILL SYSTEM only) | Daily – After Each Job | 24 |
| CLEAN VACUUM SHUTOFF ASSEMBLY SCREEN | Daily – After Each Job | 24 |
| CLEAN HYDRO-FILTER (If so equipped) | Daily – After Each Job | 25 |
| RINSE OUT RECOVERY TANK | Daily | 25 |
| FLUSH SOLUTION TANK AND PUMP | Daily | 26 |
| CLEAN PUMP-INLET FILTER | Weekly – As needed | 27 |
| FLUSH CHEMICAL SYSTEM (Machines with optional AUTO-FILL SYSTEM only) | Monthly | 28 |
| CLEAN DRAIN VALVE | As needed | 31 |
| STORAGE PREP – FREEZE PROTECTION | As needed | 32 |

CLEAN CHEMICAL FEED FILTER & FOOT VALVE: With optional Auto-Fill System Only


The Filter & Foot Valve is on the end of the chemical feed hose that is placed in the chemical jug as part of the optional Auto-Fill chemical feed system.

Regularly examine the filter and clean as needed.

To test the Foot Valve:

- Remove the Filter & Foot Valve from the end of the chemical feed hose and rinse in fresh water.
- Blow through the valve from the filter side of the barb.
 - If the Foot Valve is functioning, air should move freely from the filter side, but will not flow from the barb side of the filter.
 - If valve is not functional, clean or replace as needed.

Heavy chemical build-up can be removed with a mild acid rinse and/or the use of a brush and compressed air.

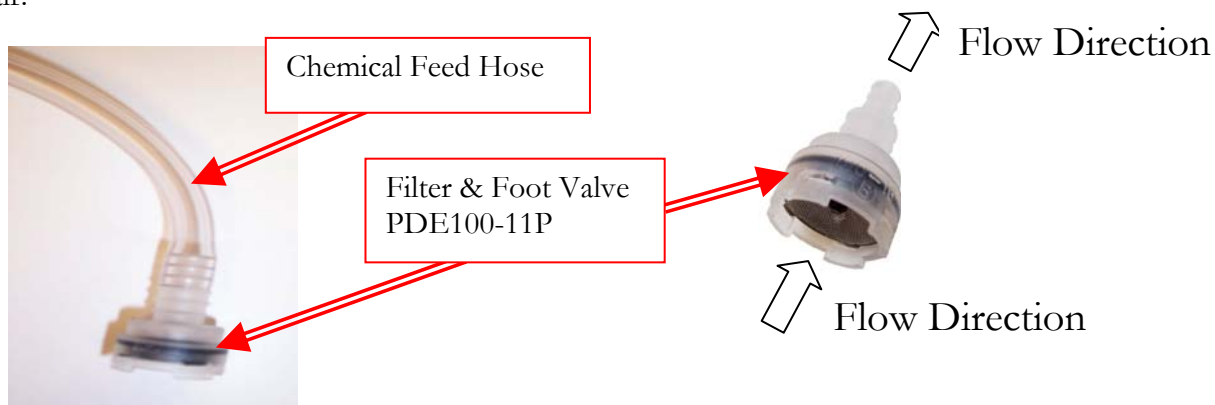

CLEAN VACUUM SHUTOFF ASSEMBLY SCREEN:

Inside the recovery tank, on top of the stand pipe, is the Vacuum Shutoff Assembly. It functions to prevent debris and water from being sucked into the vacuum motors. Operating the M3-200 without the Vacuum Shutoff Assembly or with a poorly maintained assembly will greatly decrease the life of the vacuum motors and will void the warranty.

If debris builds up on this filter, it will reduce the vacuum air flow and may cause a significant decrease in the rate of water recovery. If debris prevents the float ball from moving or seating inside the assembly, it may not stop the airflow when the tank fill with water, and the water will be sucked into the vacuums and blown out the exhaust. **Use defoamer to prevent foam or moisture from entering vacuums.**

To clean:

- Twist to loosen and pull the assembly off of the stand pipe.
- Pull fibers and lint off and rinse with clean water.
- Push the assembly back onto the stand pipe and replace the recovery tank lid.



Vacuum Shutoff Assembly
NM5037



CLEAN THE HYDRO-FILTER: (Optional Accessory)

Build-up of debris in the filter bag of the Hydro-Filter will reduce the vacuum air flow and may cause a significant decrease in water recovery. A torn filter bag will allow debris past the filter and into the recovery tank. This debris can clog the Waste Pump and the Vacuum Shutoff Assembly. **The Hydro-Filter must be examined and cleaned regularly to keep the M3-200H functioning properly:**


- Push the latch lever and open the Hydro-Filter lid.
- Remove the filter bag. Examine the bag and clean or replace as needed.
- Rinse the body of the Hydro-Filter with clean water.
- Examine the o-ring seal and replace as needed.
- Re-install the new or cleaned bag.
- Close lid and secure latch.

Repair parts are available for the Hydro-Filter:

Filter Bag: AC11A

Parts Kit: AC11B – (Includes Latch, O-ring & screws.)

Lid: AC11D

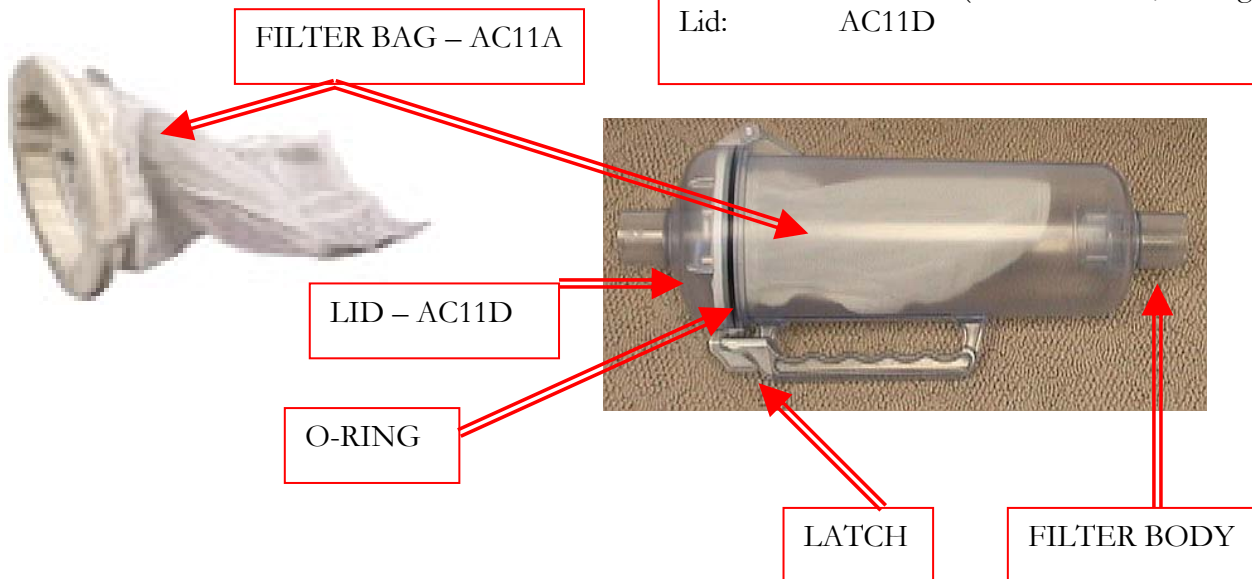

RINSE OUT RECOVERY TANK:

Build-up of fine silt and debris can damage the Drain Valve. Clean out the tank on a regular basis to extend the life of these components as well as keep the tank and machine smelling better.

- Remove the recovery tank lid and open the drain valve.
- Place a bucket under the drain valve.
- Use a hose to rinse the dirt and debris out of the recovery tank.
- Close the drain valve and spray the tank with a deodorizer or disinfectant.
- Replace the recovery tank lid or leave lid off to allow tank to dry.
- Dispose of the dirty water and debris.



FLUSH SOLUTION TANK AND PUMP:

- Pour two or three gallons of clean water into the solution tank.
- With Cords #1 & #2 plugged in, connect the pump prime hose to the solution outlet female quick connect.
- Direct the end of the prime hose into the recovery tank vacuum barb.
- Turn one or both of the vacuums ON and turn the solution pump ON.
- Let the pump run until most of the water has been pumped out of the solution tank. **Do not let the pump run dry. Turn the pump OFF before the water gets to the bottom of the tank.**
- Turn the vacuums OFF and disconnect the prime hose.
- Place a bucket under the drain valve; open the drain valve to drain the water out of the recovery tank.
- Close the drain valve and dispose of the water.



Pour 2 or 3 gallons of clean water into Solution Tank


If there is a heavy chemical build-up in the machine, hoses, or tools, a mild acid can be added to the rinse water in the previous procedure (REFER TO PHOTOS ON FOLLOWING PAGE.)

- After the pump has been primed, turn the solution pump switch OFF and turn the vacuums OFF.
- Remove the prime hose and connect the HP solution hose and tools.
- Turn the solution pump ON and direct the tool spray into a bucket. Let the pump run until most of the water has been pumped out of the solution tank. **Do not let the pump run dry. Turn the pump OFF before the water gets to the bottom of the tank.**
- Disconnect the solution hose and tool.
- Use the vacuum hose to vacuum the remaining acid solution out of the solution tank.
- Pour two or three gallons of clean water into the solution tank.
- Connect the pump prime hose to the solution outlet female quick connect.
- Direct the end of the prime hose into the recovery tank vacuum barb.
- Turn one or both of the vacuums ON and turn the solution pump ON. Let the pump run until most of the water has been pumped out of the solution tank. **Do not let the pump run dry. Turn the pump OFF before the water gets to the bottom of the tank.**
- Turn the vacuums OFF and disconnect the prime hose.
- Place a bucket under the drain valve and open the drain valve to drain the water out of the recovery tank. Close the drain valve and dispose of the water.

FLUSH SOLUTION TANK AND PUMP: (continued from previous page)



Direct the end of the prime hose into the recovery tank vacuum barb

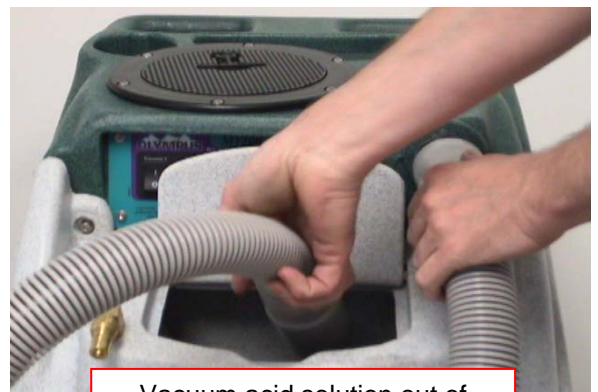



Vacuum acid solution out of Solution Tank

CLEAN PUMP INLET FILTER

A restricted Pump Inlet Filter can prevent the solution pump from providing adequate pressure for cleaning. A restriction or air leak on the pump inlet can also damage the solution pump check valves and plunger seals.

CAUTION: Before proceeding with this procedure, make sure both power cords are disconnected.

- To examine the filter, release the latch on the front of the machine and tilt the tanks off of the base assembly. Support the tanks with a chair, bucket or box while working inside the base.
- The filter is in the clear 1/2" ID hose from the solution tank to the inlet port on the solution pump.
- Grasp the clear plastic filter cap and unscrew the cap from the black plastic filter body by turning counter-clockwise.
- Remove the stainless steel filter screen and clean as needed.
- Examine the cap and body for cracks and replace filter as needed. (Replacement Filter: PPU6175)
- Check the gasket for nicks or tears and replace filter as needed.
- Reassemble filter and check hose clamps and tighten as needed.
- Tilt the tanks back onto the base and secure the latch.

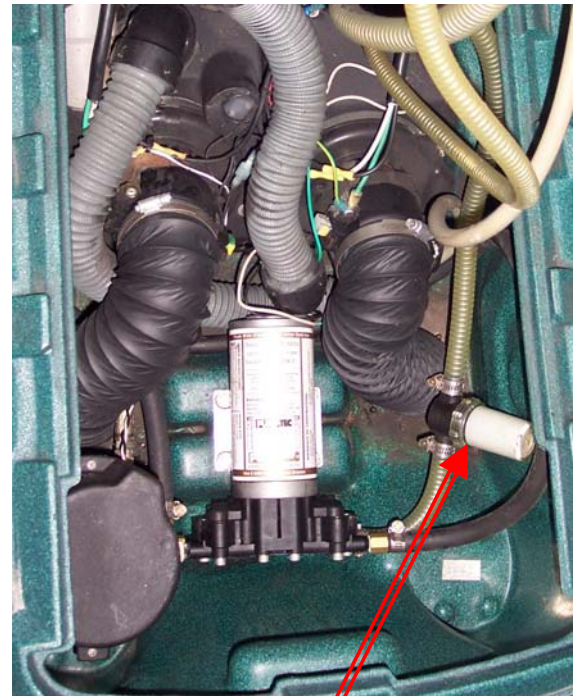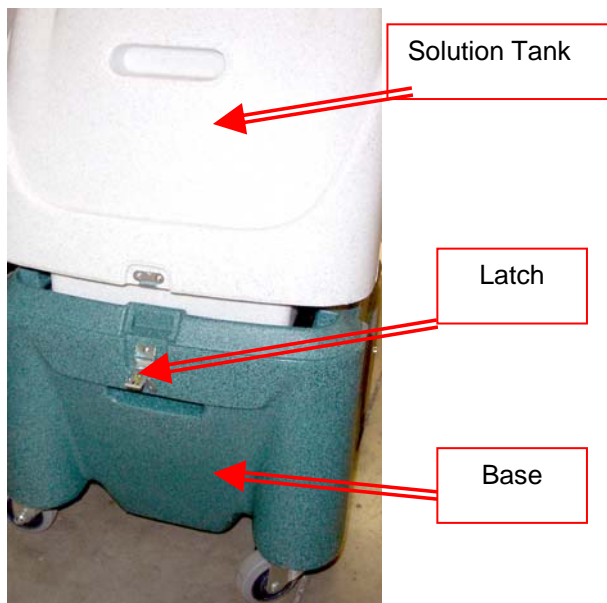

INLINE FILTER
PPU6175



FLUSH CHEMICAL SYSTEM: (With optional Auto-Fill System Only)

Chemical build-up in the chemical system can prevent the system from drawing chemical.


- Rinse the chemical system with fresh water
(For heavy chemical build-up, a mild acid can be added to the rinse.)
- Remove the chemical feed hose from the solution tank and place the end of the hose in a bucket of fresh water or mild acid solution.
- Connect the Auto-Fill Water Supply Hose to the water inlet (male quick connect) on the front of the machine.
- Connect the other end of the hose to a water faucet and turn on the water. Let the water flow into the tank until you are sure the rinse solution has been drawn through the proportioner and mixed with the incoming water. The metering tip can be removed from the proportioner to speed up the process.
- Once the rinse solution has been drawn through the proportioner, turn off the water faucet and disconnect the Auto-Fill Water Supply Hose.
- Plug in Cord #1, connect the vacuum hose to the vacuum barb, turn on vacuum #1, and use the vacuum hose to remove the water from the solution tank.
- When the solution tank has been emptied, turn off the vacuum and unplug the power cord.
- Place a bucket under the drain valve and open the drain valve to drain the water from the recovery tank.
- Close the drain valve and dispose of the water.




Place Chemical Feed Hose into Rinse Solution



Connect Auto-Fill Water Supply Hose to machine and faucet

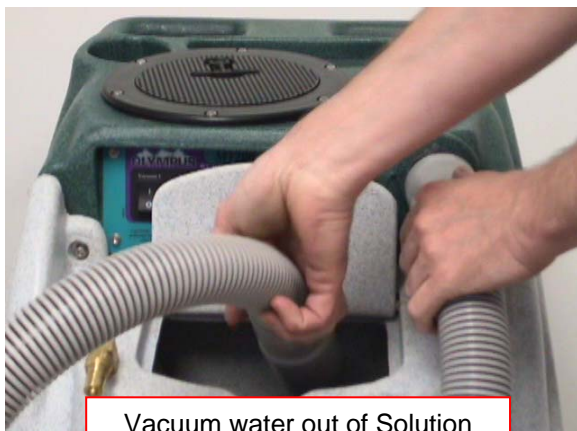

Vacuum water out of Solution Tank

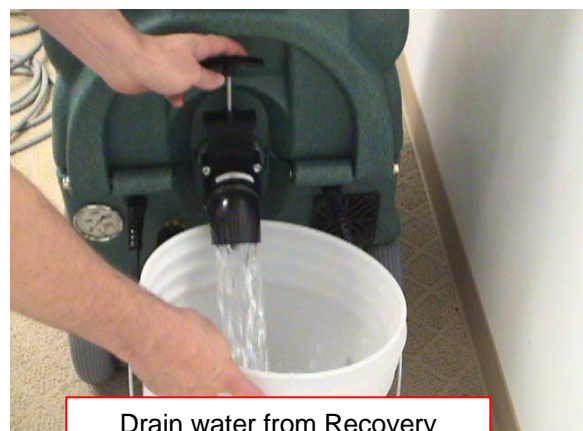

Drain water from Recovery Tank

CLEAN RECOVERY TANK DRAIN


Debris and sand accumulation in the drain valve can damage the valve or prevent it from closing completely. This will result in dirty water leaking from the valve. Use of the Hydro-Filter and regular cleaning of the recovery tank will help prevent this, but occasionally the drain valve will require cleaning or replacement.

Drain the recovery tank before attempting to service the drain valve.

- Unscrew the nuts and remove the four bolts holding the valve assembly to the flange attached to the recovery tank. Unless the flange is damaged, it does not have to be removed from the tank, even when replacing the drain valve.
- Separate the valve body, outlet adapter and gaskets from the flange.



Remove four bolts holding valve assembly to flange fitting

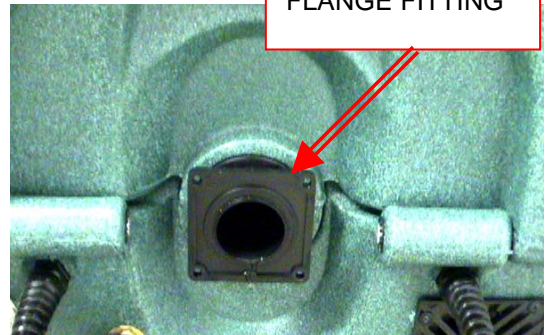


FLANGE FITTING

Unless damaged or leaking between tank and flange, the flange fitting does not have to be removed



DRAIN VALVE – PEA11

VALVE BODY

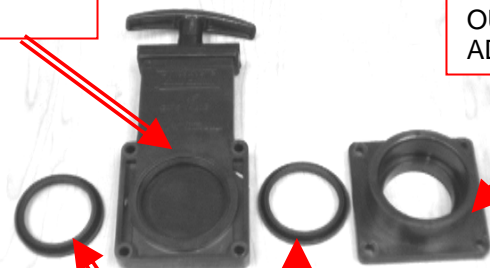

OUTLET ADAPTER

GASKET – NM3019

- Examine the valve body for wear. Check the valve slide for deep scratches. Deep scratches will allow water to flow past gaskets and leak from valve. Replace valve if needed.
- Examine the gaskets and replace if cut, torn or deformed.
- Raised, rounded side of gasket goes toward valve slide. Larger flat sides seat on ring on flange and outlet adapter. Sand and debris will collect in the bottom of the valve body and prevent the slide from going down and seating properly.
- Clean debris out as needed so slide can move to bottom.
- Rinse valve body and reassemble valve body, gaskets and outlet adapter, and place assembly back onto flange fitting.
- Replace four bolts and tighten evenly to secure assembly to flange. Do not over-tighten bolts.



Clean debris from slot in bottom of valve body. Valve slide must be able to slide to bottom.

Storage Prep and Freeze Protection Procedures:

Your Olympus M3-200H must be protected from freezing. Freezing can cause serious damage to the pump, pump-out, auto-fill float valve, and any other component containing water. If the M3-200H is transported or stored in freezing temperatures, the following procedures should be performed.

ALSO, if the M3-200H is stored for an extended period of time, the following procedure should be performed to prevent the pump seals from drying out.

1. In a separate container mix 1/2 gallon of water with 1/2 gallon of automotive radiator anti-freeze. (Ethylene glycol type). Mix well and pour into the solution tank.
2. Connect the pump prime hose to the solution outlet (female quick connect) and perform the pump priming procedure, directing the flow back into the solution tank. When the pump is primed, turn the pump off and disconnect the priming hose.
3. If equipped with Auto-Fill (If not go to step #5); connect the HP solution hose to the solution outlet (female quick connect.) Connect the opposite end of the HP solution hose to the Auto-Fill inlet (male quick connect.) Leave the chemical feed hose in the solution tank and ensure the check valve filter is submerged in the anti-freeze solution. To speed the process the metering tip can be removed. The higher flow rate should reduce the pressure so it is safe for the Auto-Fill system. Be sure float is high enough and fluid level is low enough that float valve does not close. If the valve closes the pressure may build high enough to damage the float valve. **CAUTION: Applying high pressure (over 100psi) to the Auto-Fill system will cause damage to the Float valve and chemical proportioning mechanism.**
4. Turn the solution pump switch to the ON position. Allow the anti-freeze to circulate for 5-10 minutes. Mix and add more anti-freeze solution as needed. Make sure end of chemical feed hose stays submerged in the anti-freeze solution. This will assure that the anti-freeze will be drawn into the proportioning valve. Then turn the solution pump off.
5. Connect any cleaning tools that will be stored with the M3-200H. Turn the solution pump switch to the ON position. Direct tool spray back into the solution tank or into a bucket. Turn the solution pump off and repeat for all tools to be protected.
6. Turn the solution pump switch to the OFF position.
7. Use the vacuum hose to vacuum the remaining anti-freeze solution out of the solution tank and bucket.
8. Drain the remaining anti-freeze solution from the recovery tank and the machine is ready for storage.





RETURNING THE M3-200H TO SERVICE AFTER STORAGE OR FREEZE PROTECTION:

To return the M3-200H to service, the anti-freeze must be flushed from the machine. Flush the anti-freeze out of the machine by repeating the procedures above using fresh water in place of anti-freeze.

Parts

Replacement parts available for repair of your M3-200H

M3-200H PUMP – AP50 PARTS ASSEMBLY

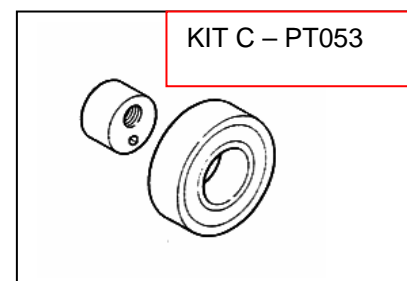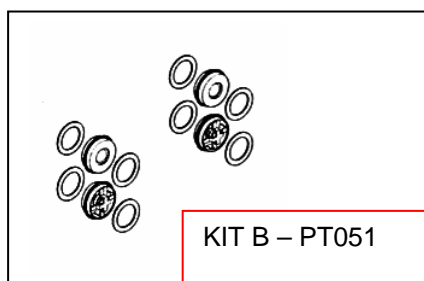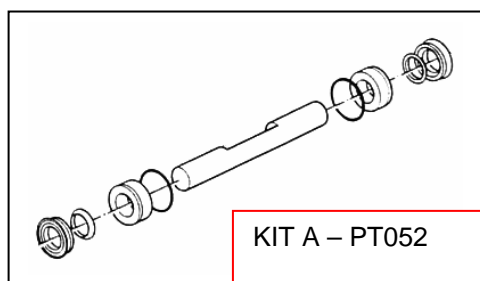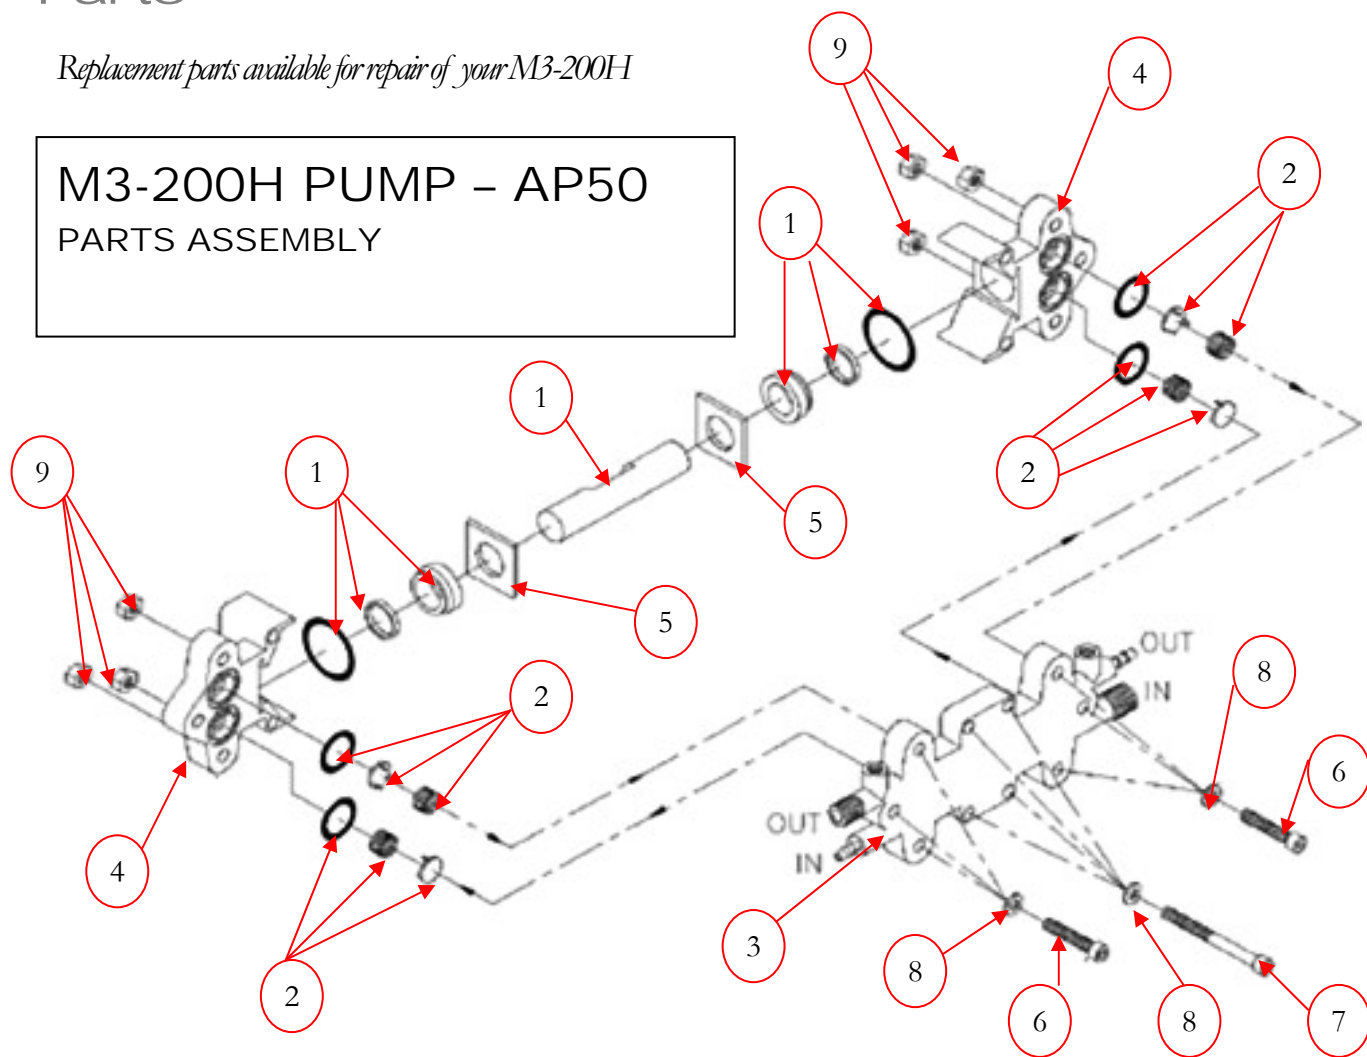

PUMPTEC #114 PUMP – AP50


| ITEM | DESCRIPTION | QTY | PART NUMBER |
|------|--------------------------------|-----|-----------------------------|
| 1 | KIT A PLUNGER & SEALS | 1 | PT052 |
| 2 | KIT B VALVES & O-RINGS | 1 | PT051 |
| NS | KIT C CAM & BEARING | 1 | PT053 |
| 3 | MANIFOLD | 1 | 0114-0004-3110 |
| 4 | PUMP HEAD | 2 | 0114-0002-0111 |
| 5 | RETAINER PLATE | 2 | 0111-0014-0001 |
| 6 | HEAD BOLT | 6 | BOLT-1/4-20 X 1 1/4-SHCS-SS |
| 7 | MOUNT BOLT | 4 | BOLT-1/4-20 X 2 1/2-SHCS-SS |
| 8 | WASHER FLAT M6 STAINLESS STEEL | 10 | WSH-FLAT-M6-SS |
| 9 | NUT 1/4-20 NYLOCK – HEAD BOLT | 6 | NUT-1/4-20-NYLOC-ZP |
| NS | PUMP COMPLETE - WITH MOTOR | 1 | AP50 |
| NS | PUMP COMPLETE - WITHOUT MOTOR | 1 | PT050 |
| NS | MOTOR | 1 | PT061 |

PRESSURE REGULATOR – PT048




1


| | DESCRIPTION |
|----|--------------------------------------|
| 1 | REGULATOR COMPLETE (PT048) |
| 2 | REGULATOR BODY |
| 3 | PISTON |
| 4 | PISTON SEAL |
| 5 | SPRING PLATE |
| 6 | SPRING |
| 7 | KNOB |
| NS | REPAIR KIT INCLUDES # 3 & 4 (PT048A) |

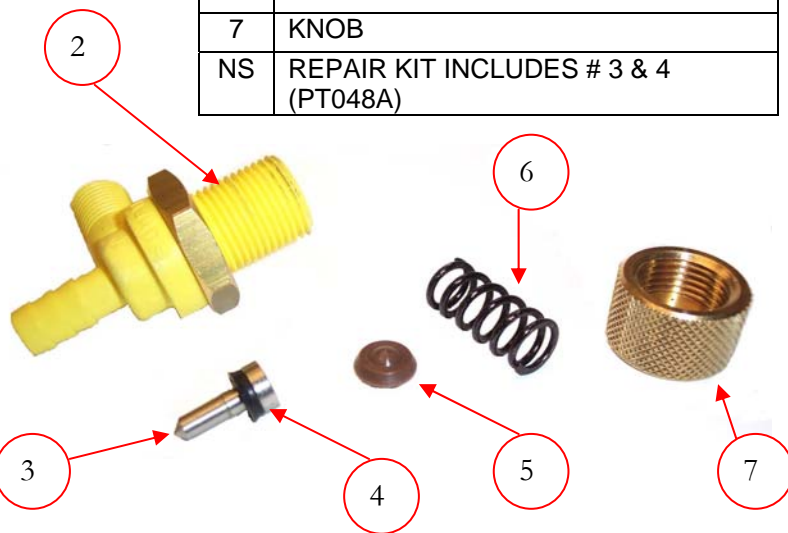


OLYMPUS AUTO-FILL FLOAT VALVE ASSEMBLY (Optional)

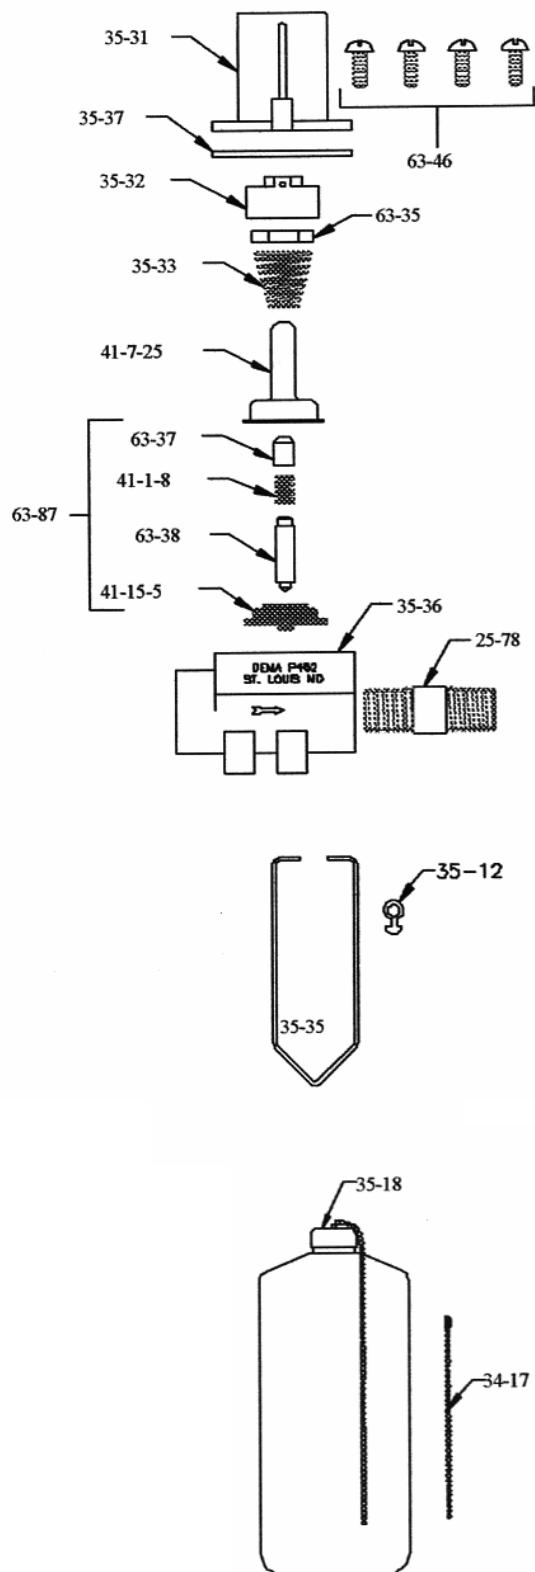

| Part Number | Description |
|-------------|---|
| 16-3 | 3' Discharge Tubing |
| 25-78 | Pipe Nipple |
| 34-17 | 16" Chain with Connector |
| 34-22 | Backflow Preventer |
| 35-12 | Float Hanger Clip – PDE35-12 |
| 35-18 | Float Assembly – PHY005-003 |
| 35-31 | Magnet Housing |
| 35-32 | Magnet Holder |
| 35-33 | Spring |
| 35-35 | Float Hanger Wire – PDE35-42 |
| 35-36 | Valve Body |
| 35-37 | Flange |
| 41-1-8 | Spring |
| 41-7-25 | Enclosing Tube |
| 41-15-5 | Diaphragm |
| 61-121 | Elbow 90° Street 1/4" |
| 61-122 | Adapter |
| 61-107-2 | Ceramic Weight |
| 61-22-3 | Proportioner – PDE61-22-3 |
| 63-35 | Magnet |
| 63-37 | Spacer |
| 63-38 | Plunger |
| 63-46 | Screw 8-18 x 1/2" (4 req.) |
| 63-87 | Valve Repair Kit - PDE63-87 (Includes: 41-1-8, 41-15-5, 63-37 & 63-38) |
| 100-3 | Rubber Washer |
| 100-11P | Foot Valve – Filter – PDE100-11P |
| 100-12 | 8' x 1/4" Plastic Tubing – XAF1 |
| 100-15 | Metering Tip - Turquoise |

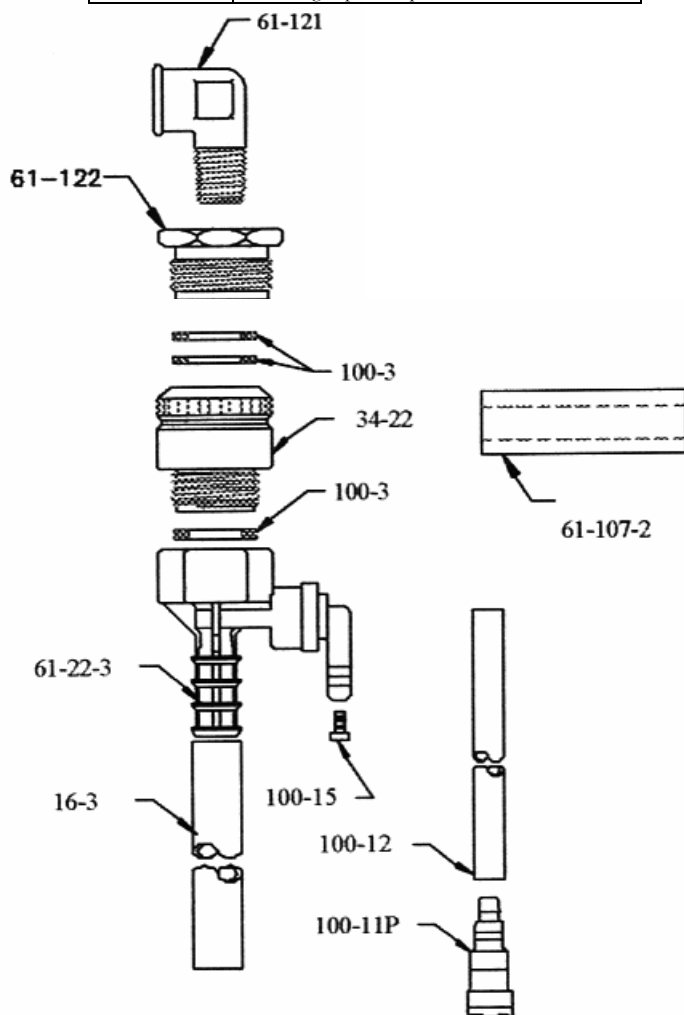


SOLUTION TANK WITHOUT AUTOFILL

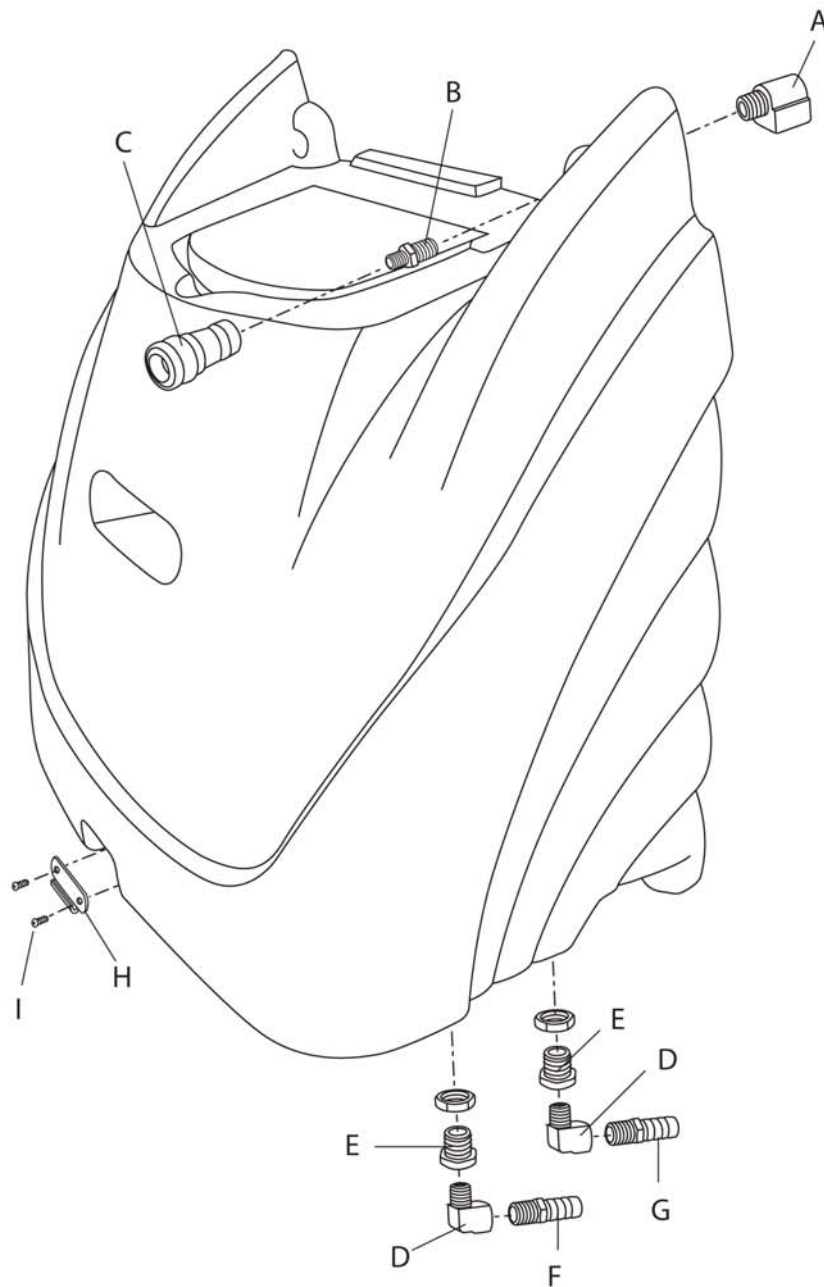

| ITEM | PART # | DESCRIPTION | QTY | ITEM | PART # | DESCRIPTION | QTY |
|------|--------|-------------------------------|-----|------|--------|----------------------------|-----|
| A | BR282 | ELBOW 90 - 1/4" STREET M-F BR | 1 | E | NM5087 | BULKHEAD FITTING 1 | 2 |
| B | BR072 | NIPPLE 1/4" HEX BRASS | 1 | F | BR028 | BARB 1/2" X 1/4" MPT BRASS | 1 |
| C | 100008 | QUICK CONNECT 1/4" | 1 | G | BR020 | BARB 3/8" X 1/4" MPT BRASS | 1 |
| D | BR282 | ELBOW 90 - 1/4" STREET M-F BR | 2 | H | NS121 | LATCH HOOK | 1 |
| | | | | I | NM5023 | SCREW 8-32 x 3/8" B | 2 |

SOLUTION TANK WITH AUTOFILL OPTION


M3-200H

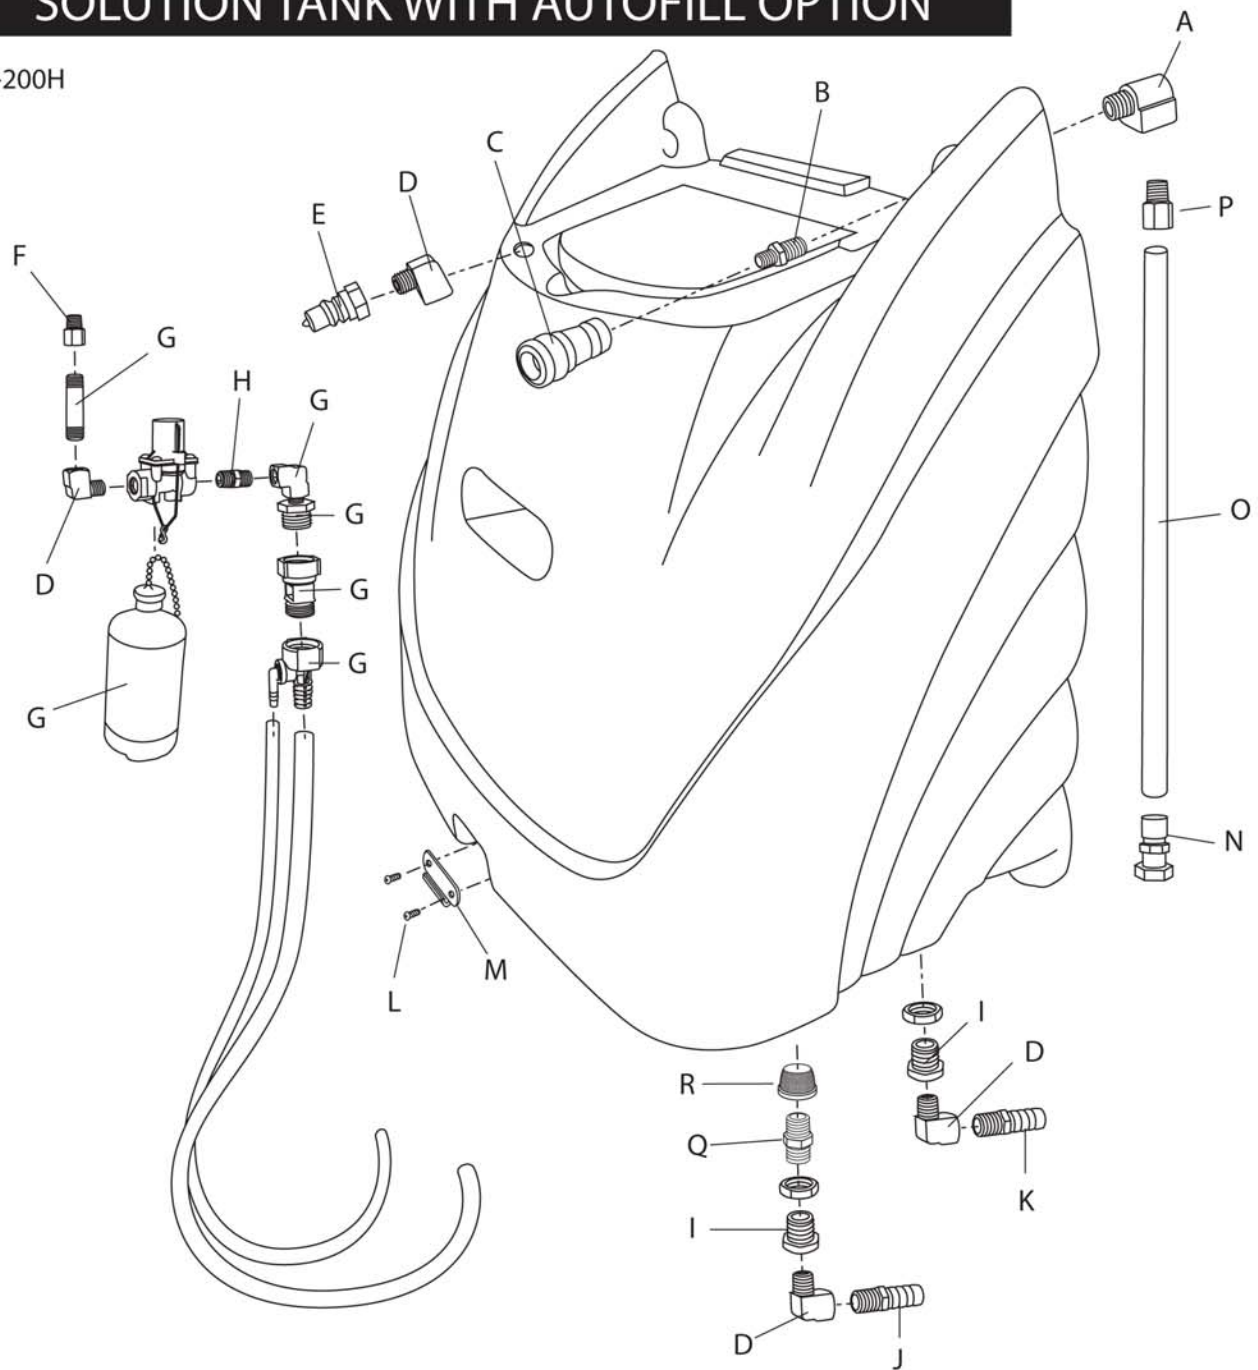

| ITEM | PART # | DESCRIPTION | QTY | | ITEM | PART # | DESCRIPTION | QTY |
|------|--------|--------------------------------|-----|--|------|-----------|----------------------------|-----|
| A | BR282 | ELBOW 90 - 1/4" STREET M-F BR | 1 | | J | BR028 | BARB 1/2" x 1/4" MPT BRASS | 1 |
| B | BR072 | NIPPLE 1/4" HEX BRASS | 1 | | K | BR020 | BARB 3/8" x 1/4" MPT BRASS | 1 |
| C | 100008 | QUICK CONNECT 1/4" | 1 | | L | NM5023 | SCREW 8-32 x 3/8" B | 2 |
| D | BR282 | ELBOW 90 - 1/4" STREET M-F BR | 4 | | M | NS121 | LATCH HOOK | 1 |
| E | 100009 | QUICK CONNECT 1/4" | 1 | | N | XAF02 | HOSE END COMPRESSION | 1 |
| F | BR174 | ADAPTER 1/4" MPT x 1/4" FPT BR | 1 | | O | AH79CF | SOI HOSE HYDROCOIL BRAY | 5' |
| G | NM5055 | FLOAT VALVE ASSY W/ | 1 | | P | XAF01 | HOSE END 1/4 | 1 |
| H | BR072 | NIPPLE 1/4" HEX BRASS | 1 | | Q | BR072 | NIPPLE 1/4" HEX BRASS | 1 |
| I | NM5087 | BULKHEAD FITTING 1 | 2 | | R | PCE290-08 | STRAINER ACORN 1/4" FPT | 1 |


SOLUTION TANK INTERNAL WITHOUT AUTOFILL

M3-200H

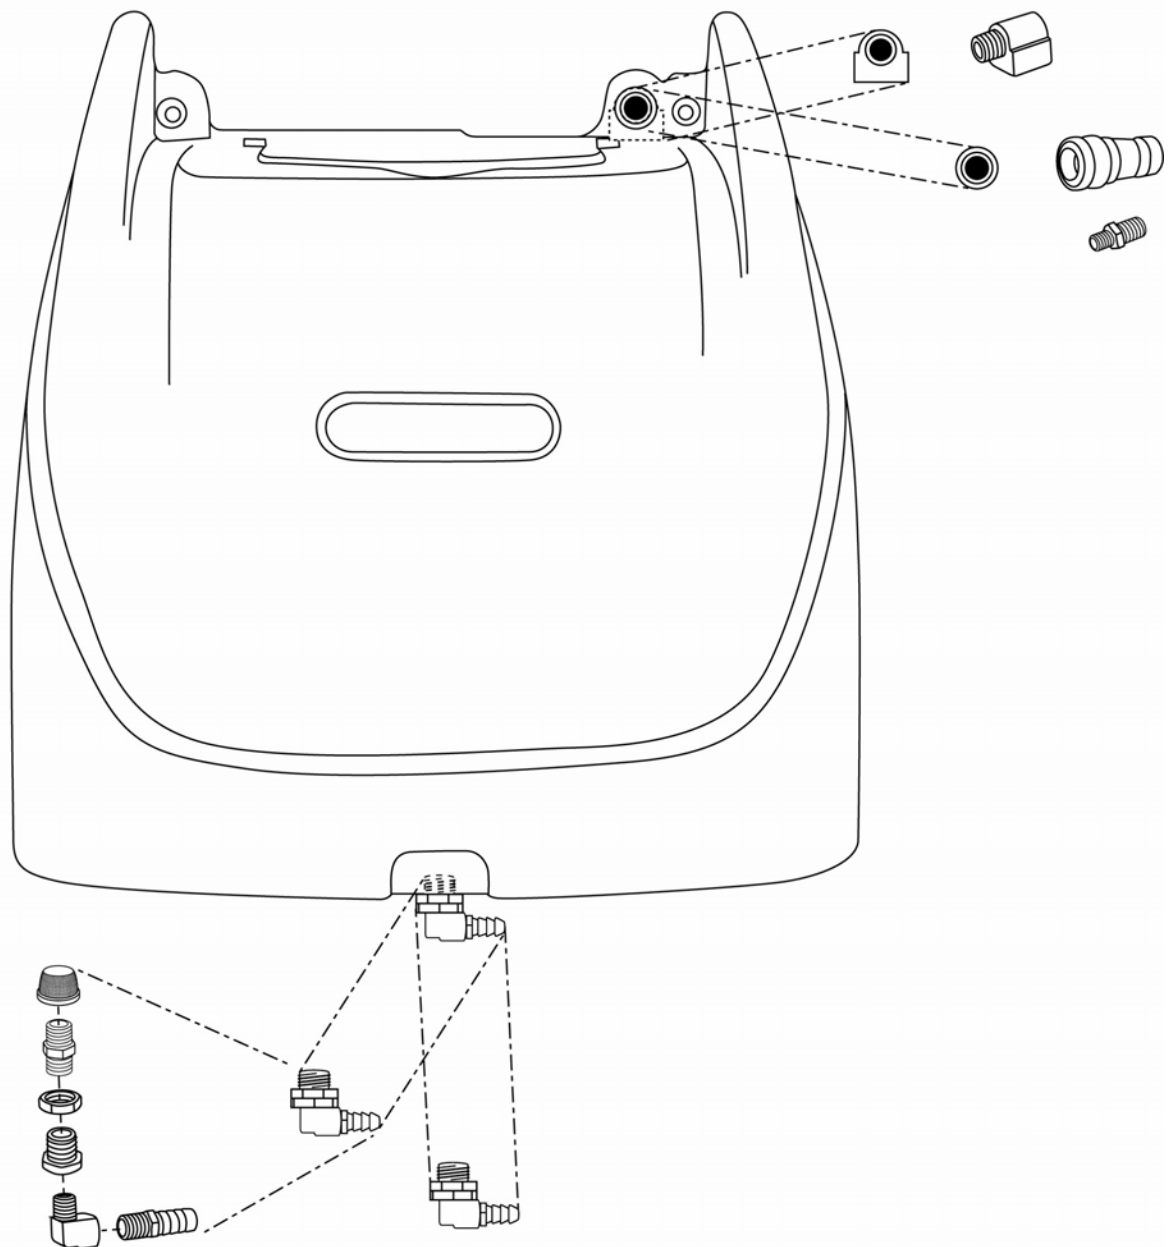

WASTE TANK WITHOUT PUMPOUT


M3-200H

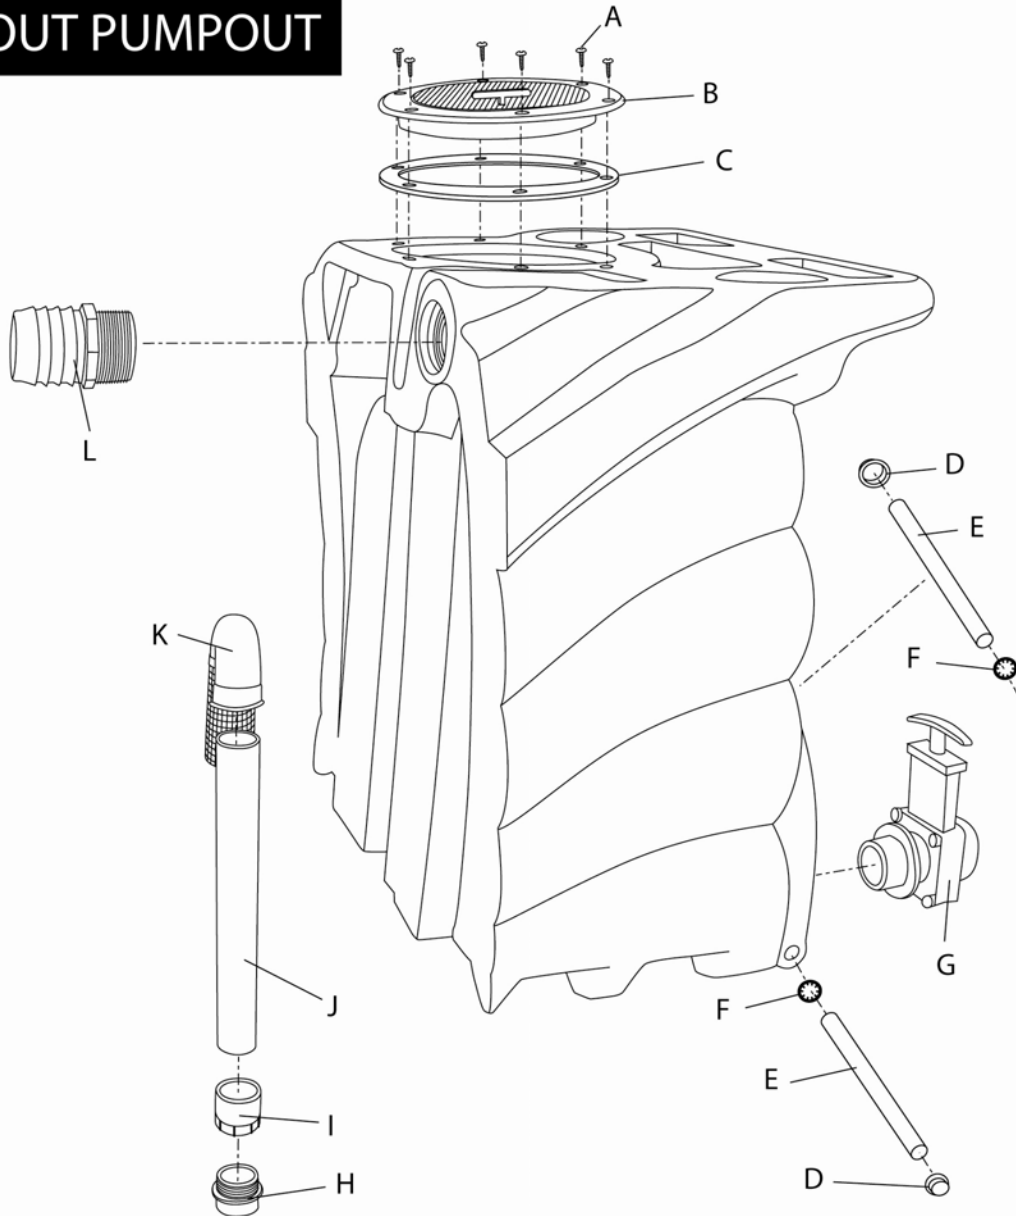

| ITEM | PART # | DESCRIPTION | QTY | ITEM | PART # | DESCRIPTION | QTY |
|------|--------|--------------------------|-----|------|--------|----------------------|-----|
| A | PA187 | SCREW #10 x 5/8" SH | 6 | G | PEA11 | VALVE 1-1/2" MPT GA | 1 |
| B | NM5004 | LID ASSEMBLY WASTER TANK | 1 | H | NM5042 | ADAPTER 1-1/2" MPTX | 1 |
| C | NM5059 | GASKET WASTE TANK L | 1 | I | NM5081 | ADAPTER 1-1/2" FPT X | 1 |
| D | NM5010 | CAP AXLE OLYMPUS RE | 2 | J | NM5036 | PIPE 1-1/2" X 17" A | 16" |
| E | NM5013 | HINGE POST | 2 | K | NM5037 | FLOAT & FILTER CAGE | 1 |
| F | NM5026 | HINGE RETAINING CLI | 2 | L | AH69 | BARB 2" x 1-1/2" MP | 1 |


WASTE TANK SIDE INTERNAL VIEW WITHOUT PUMPOUT

M3-200H

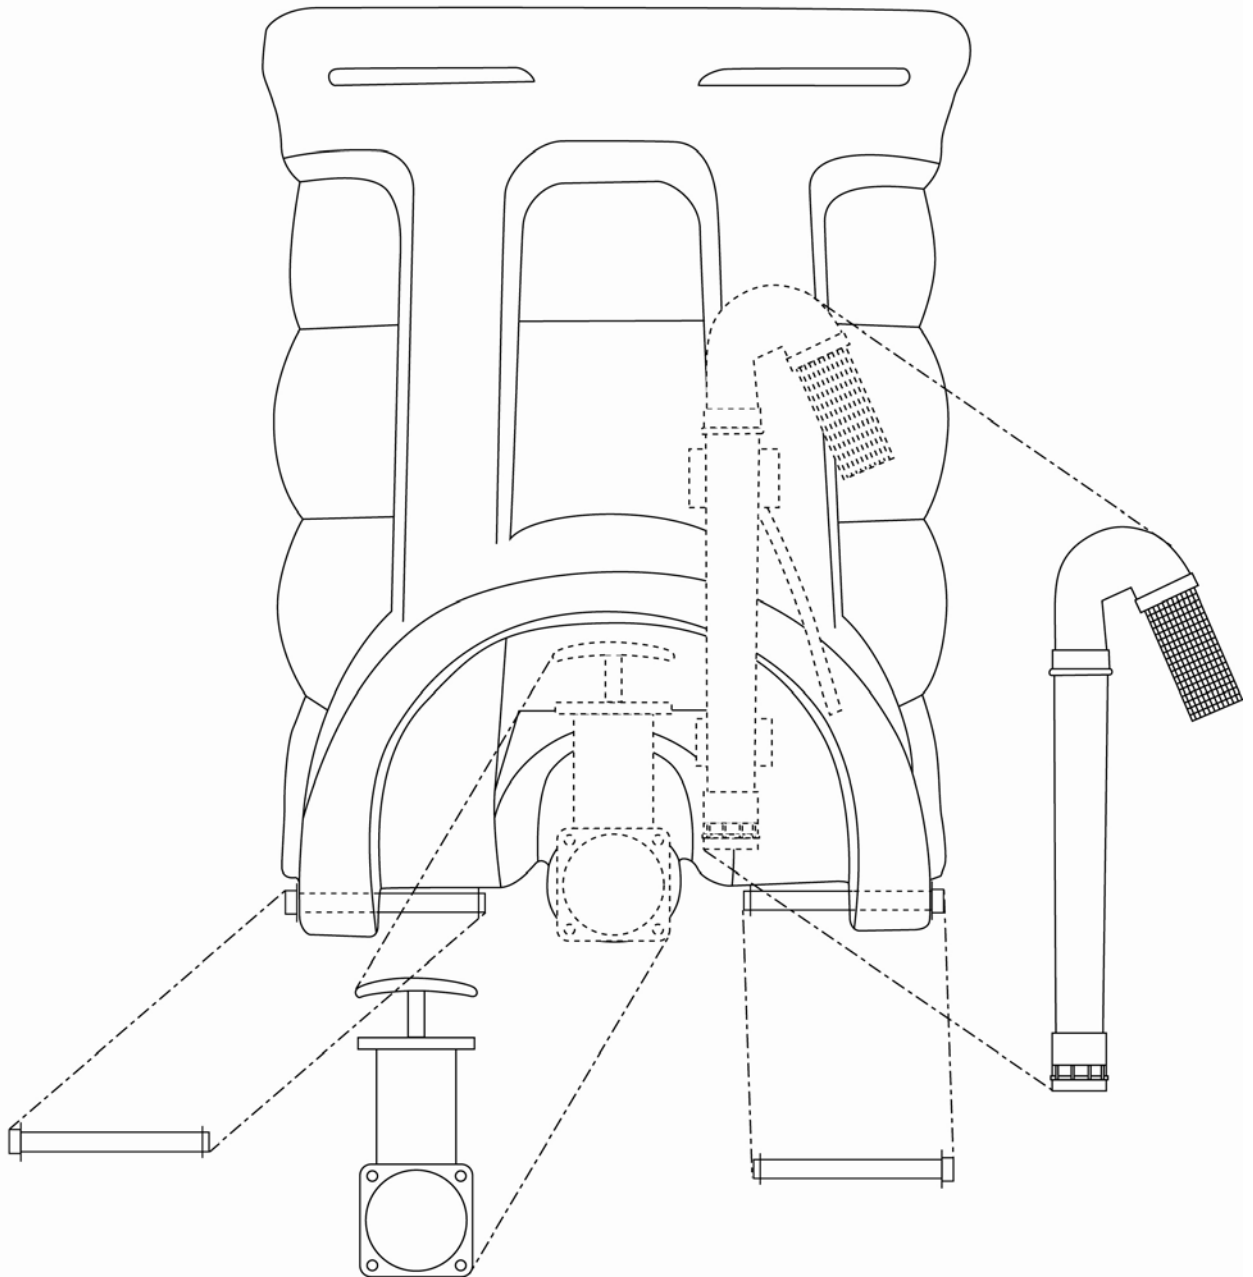

BASE WITH VACUUMS & COMPONENTS


M3-200H

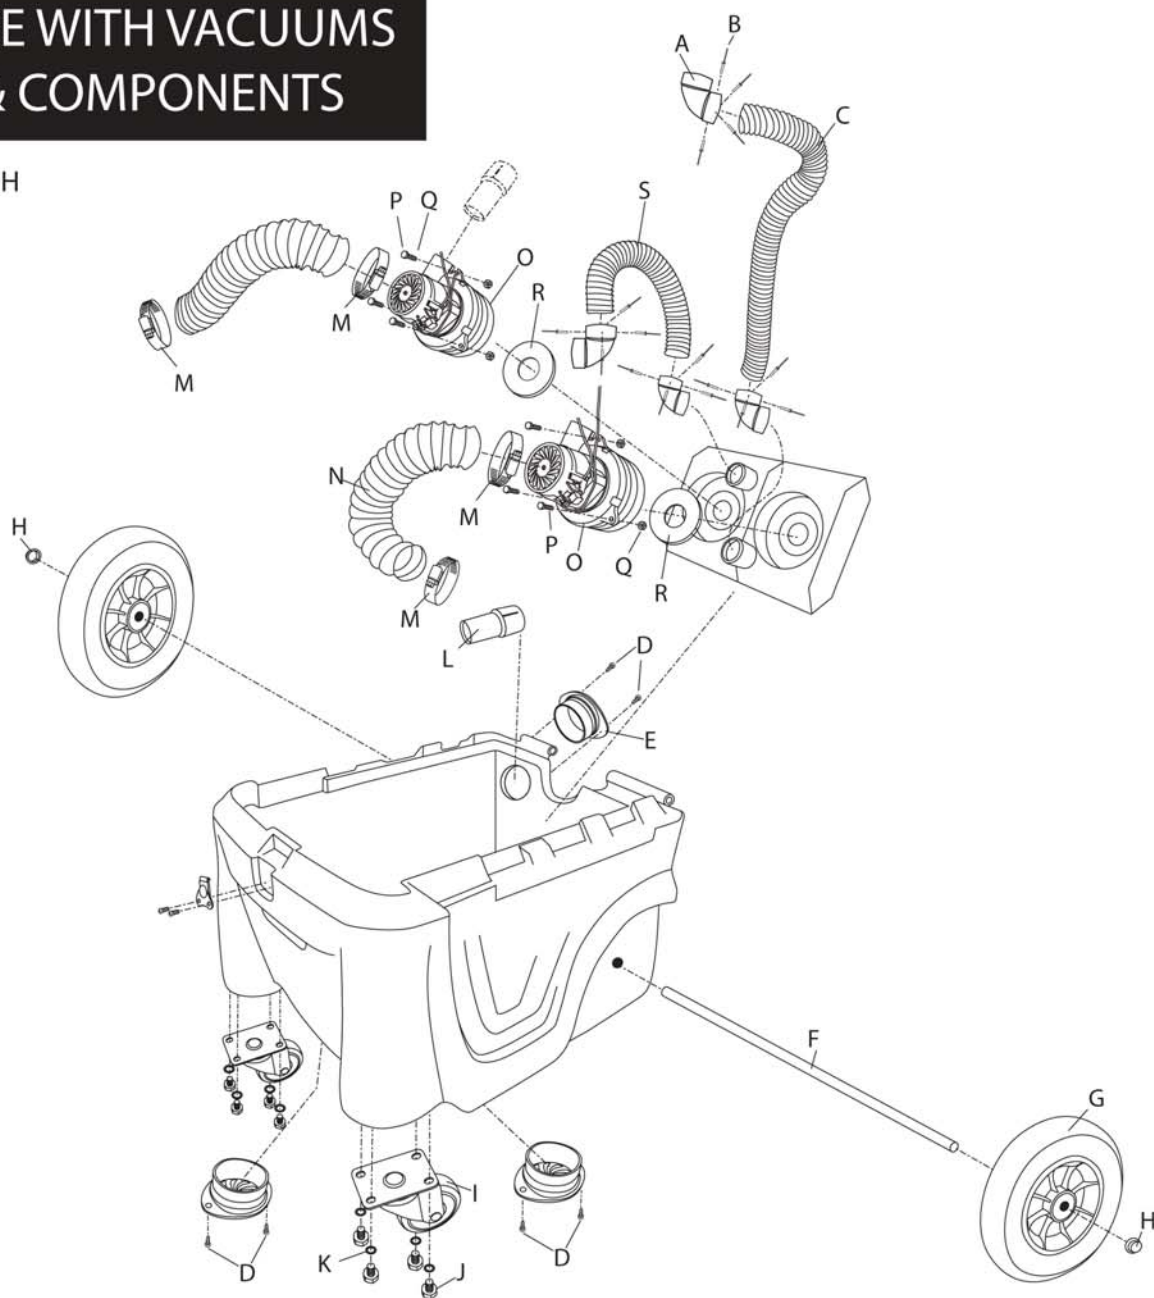

| ITEM | PART # | DESCRIPTION | QTY | ITEM | PART # | DESCRIPTION | QTY |
|------|--------|--------------------------------|-----|------|--------|--------------------------------|-----|
| A | NM5041 | ELBOW 90 - 1-1/2" ABS | 4 | K | NM5014 | WASHER LOCK - CASTER | 8 |
| B | NM5025 | RIVET HOSE ELBOW | 16 | L | AH42 | CUFF 1-1/2" HOSE | 1 |
| C | NM5050 | VAC HOSE 1-1/2" WIRE REINFORCE | 21" | M | PHO14 | CLAMP HOSE SCREW 3" | 4 |
| D | PA184 | SCREW 8x3/8 SHEET METAL | 6 | N | XJ001 | DUCT 3" x 5 VINYL BLACK | 36" |
| E | NM5015 | GRATE VAC EXHAUST | 3 | O | AV14 | VAC MOTOR 5.7 3 STAGE | 2 |
| F | NM5011 | AXLE OLYMPUS REAR WHEEL | 1 | P | NM5089 | SCREW 10-32 x 1-1/2" SS | 6 |
| G | NM5002 | REAR OLYMPUS WHEEL | 2 | Q | NM5033 | WASHER MANIFOLD BOTLS | 6 |
| H | NM5010 | REAR WHEEL AXLE CAP | 2 | R | PA010 | GASKET VAC MOTOR 5.7" | 2 |
| I | NM5003 | FRONT CASTER | 2 | S | NM5050 | VAC HOSE 1-1/2" WIRE REINFORCE | 24" |
| J | NM5012 | SCREW 1/4-20 x 1" HX HD | 8 | | | | |

BASE WITH PUMP & COMPONENTS

M3-200H

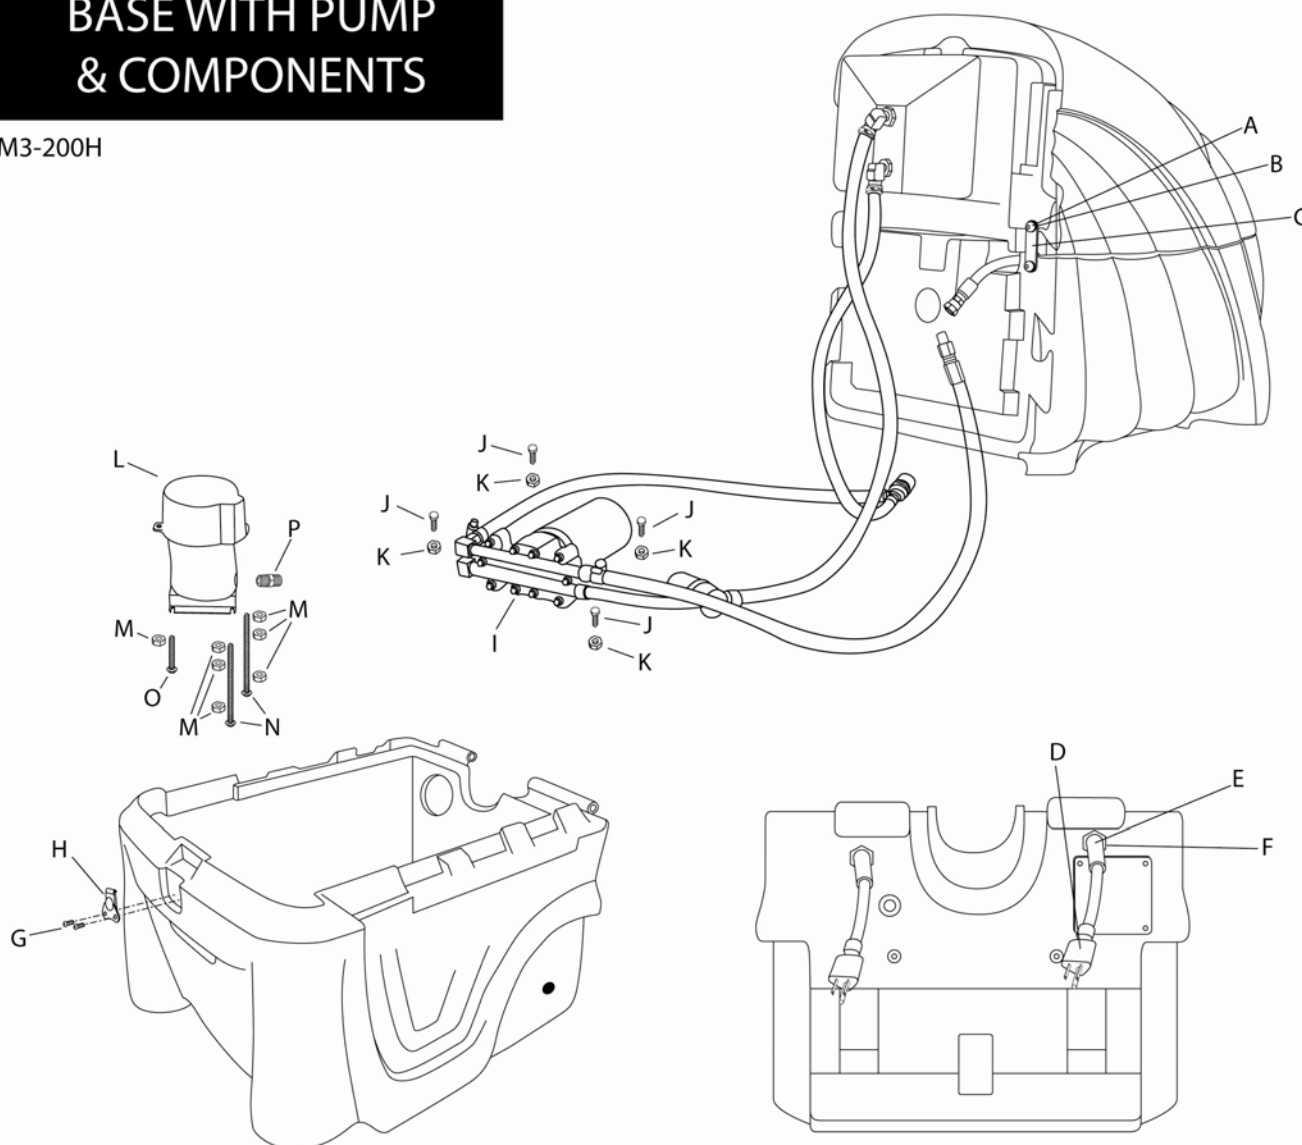

REAR VIEW

| ITEM | PART # | DESCRIPTION | QTY | ITEM | PART # | DESCRIPTION | QTY |
|------|--------|-----------------------------|-----|------|--------|---------------------------|-----|
| A | NM5028 | SCREW 1/4-20x1/2" SS SOC HD | 4 | I | NM5067 | KIT PUMP TEC 200 PSI PUMP | 1 |
| B | NM5030 | WASHER 1/4" FLAT BLACK | 4 | J | NM5034 | SCREW 1/4-20x1" HX HD | 4 |
| C | NM5027 | BRACKET SOL/REC TANK | 2 | K | NM4003 | NUT 1/4-20 HEX SS | 4 |
| D | NM5009 | CORD 12/3x2'W/MALE END | 2 | L | NM5044 | HEATER | 1 |
| E | NM5038 | STRAIN RELIEF | 2 | M | PA231 | NUT 10-24 HEX | 7 |
| F | NM5039 | NUT STRAIN RELIEF | 2 | N | NM5047 | SCREW 10-24 HEX | 2 |
| G | NM5023 | SCREW 8-32x3/8" BH SOC SS | 2 | O | PA233 | SCREW 10-24 X 1 FLTHD MS | 1 |
| H | NS121 | LATCH HOOK | 1 | P | BR072 | NIPPLE 1/4" HEX BRASS | 1 |

Limited Warranty

Your Olympus M3-200H is designed to give you years of reliable service. If a problem should arise use the troubleshooting section in the operation manual to diagnose and correct the problem if possible.

If you are unable to determine the cause or solution to the problem contact your distributor or Hydro-Force for assistance.

Hydro-Force warrants the roto-molded tanks and base of the Olympus M3-200H to be free from defects in material or workmanship for five years from the date of purchase.

All other components of the Olympus M3-200H are warranted to be free of defects in material and workmanship for one year from the date of purchase.

During the warranty period, Hydro-Force will, at its option repair or replace components which prove to be defective. This warranty does not provide for replacement of complete units due to defective components. Any costs for transportation or related service labor are not covered in this warranty. Replacement parts are warranted only for the remainder of the original warranty period.

This warranty shall not apply to defects resulting from improper operation, lack of maintenance, unauthorized modification, chemical incompatibility, misuse, abuse or exposure to freezing temperature conditions. It does not cover normal wear items such as o-rings, valve seals, pump seals, hoses, jets, cords, batteries, or other items which require replacement as a result of ordinary usage.

To obtain warranty service for the Olympus M3-200H, contact your distributor or Hydro-Force. If the extractor must be returned to Hydro-Force or an authorized service center, the purchaser shall prepay shipping charges for products returned for warranty service. No returned items will be accepted by Hydro-Force without prior authorization. All returns must have a return authorization number, issued by Hydro-Force, clearly marked on the exterior of the package.

Hydro-Force makes no other warranty either expressed or implied with respect to this product.

The remedies provided herein are the purchaser's sole and exclusive remedies. In no event shall Hydro-Force be liable for any direct, indirect, special, incidental or consequential damages.

This warranty gives you specific legal rights. You may also have other rights which vary from jurisdiction to jurisdiction.